# LED-INVERTER
# L88028HI


IP20

**LED INVERTER HIGH VOLTAGE 4W 1h 250V**

The LED INVERTER kit allows you to convert a regular LED fixture into an emergency LED light. In case of a power failure, the light will turn on with emergency output



| | |
|---|---|
| **CODE** | L88028HI |
| **POWER (W)** | 4W |
| **AUTONOMY (U)** | 1h |
| **TYPE** | |
| **RESCUE (LM)** | |
| **PERMANENT (LM)** | |
| **BATTERY** | LI-FEPO4 |

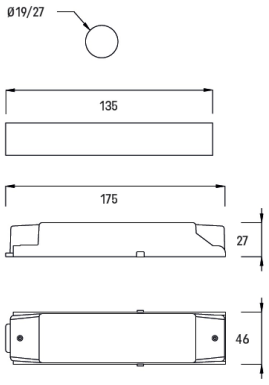


## Features

| | |
|---|---|
| PRODUCT NAME | LED-INVERTER |
| PRODUCT FUNCTION | KITS DE SECOURS |
| SYSTEM POWER (W) : | 4W |

# LED-INVERTER
# L88028HI

| | |
|---|---|
| SURVEILLANCE SYSTEM INSTALLATION | SANS |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP20 |
| HOUSING MATERIAL | PLASTIQUE 94V-2 (UL94) |
| HOUSING COLOUR | WHITE RAL 9003 |
| HEIGHT/DEPTH (MM) : | 41mm |
| LENGTH (MM) : | 170mm |
| WIDTH (MM) : | 35mm |
| MOUNTING WIDTH | 170mm |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B207035040 |
| RECUPEL CODE | - |
| BATTERY WEIGHT (G) : | 0 |
| EAN | 8021046121995 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 60598-1<br>EN 60598-2-22 |
| MODE | Standard |
| NOMINAL OPERATING TIME | 1h |
| PROTECTION CLASS | II |

## Accessories

**L99150** - COMMANDER

