
IP42 IK08 16 pcs


SELFIE 11W 160lm 2h NM IP42



CODE	L28011
POWER (W)	11W
AUTONOMY (U)	1h
TYPE	
RESCUE (LM)	160lm
PERMANENT (LM)	160lm
BATTERY	NI-CD

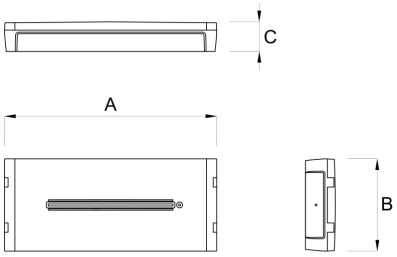

A=230mm B=100mm C=32mm

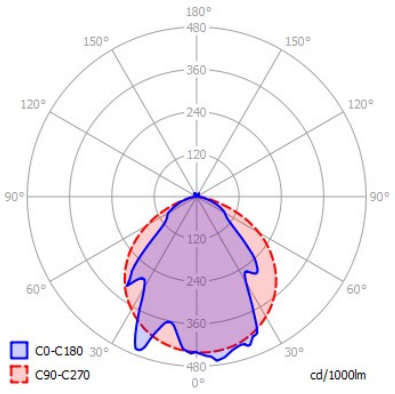

Features

PRODUCT NAME	
PRODUCT FUNCTION	
SYSTEM POWER (W) :	11W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	160lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	160lm

SURVEILLANCE SYSTEM INSTALLATION	SANS
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	NI-CD
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	32mm
LENGTH (MM) :	230mm
WIDTH (MM) :	100mm
MOUNTING WIDTH	230mm
PRODUCT WEIGHT (G) :	500GR
NUMBER OF PRODUCTS PER BOX	16
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	NI-CD
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020194
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	91 gr.
EAN	8021046036053
EAN PACK	8021046317046

COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Flag mounting Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II

Accessories

L91080 - PICTO DEVIDOIR 200x200



L99021 - PROTECTION GRID



L99050 - SELFIE SET FOR RECESSED



L99051 - SELFIE SIGNALING KIT



L99053 - SELFIE KIT IP65



L99150 - COMMANDER

