# ALIEN-
# L3648HI-B-SE-DET-D


IP54 IK10


**ALIEN 15W 4000K 2500lm - 300lm 1h WHITE + SENSOR + EMERGENCY DALI**

The Alien LED model, with its round shape, stands out for its high durability. It is suitable for both wall-mounted and ceiling applications, indoors and outdoors. It is available in two colors: white or black.



| | |
|---|---|
| **CODE** | L3648HI-B-SE-DET-D |
| **POWER (W)** | 15W |
| **AUTONOMY (U)** | 1h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 300lm |
| **PERMANENT (LM)** | 2500lm |
| **BATTERY** | LI-FEPO4 |



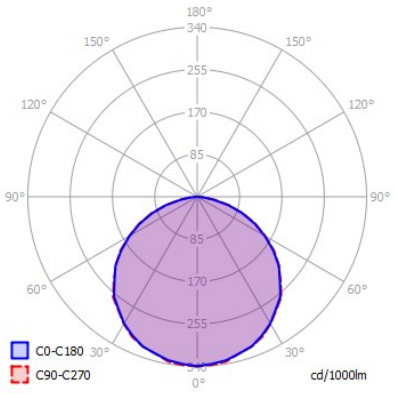
## Features

| | |
|---|---|
| PRODUCT NAME | ALIEN- |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED HERMÉTIQUES |
| SYSTEM POWER (W) : | 15W |

LINERGY
EMERGENCY LIGHTING

# ALIEN-
# L3648HI-B-SE-DET-D

| | |
|---|---|
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 300lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 2500lm |
| SURVEILLANCE SYSTEM INSTALLATION | DALI |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | Li-FeP04 3,2V - 1,5Ah |
| BATTERY RECHARGE TIME (H) : | 24H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP54 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | WHITE RAL 9003 |
| MATERIAL OF THE COVER | POLYCARBONATE OPAL |
| IMPACT RESISTANCE | IK10 |
| HEIGHT/DEPTH (MM) : | 100mm |
| EXTERNAL DIAMETER (MM) : | 335mm |
| PRODUCT WEIGHT (G) : | 1500GR |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE) | 34 |
| MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE) | 56 |
| NONIMAL LIFETIME L70/B50 (H) : | 100.000H |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | -5°C / +55°C |
| COLOUR TEMPERATURE | 4000K |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020523 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 48 |
| EAN | 9900000006099 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22 |

# ALIEN-
# L3648HI-B-SE-DET-D

| | |
|---|---|
| FUNCTION | Ambient and evacuation lighting<br>Lighting with detection<br>Twilight |
| INSTALLATION METHOD | Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Dali<br>Security<br>Sensor |
| NOMINAL OPERATING TIME | 1h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |