ALIEN-
L3648HI-B-DET-DD-65


IP65 IK10


ALIEN 15W 4000K 2500lm - 300lm IP65 WHITE 1h DALI + SENSOR + EMERGENCY DALI

The Alien LED model, with its round shape, stands out for its high durability. It is suitable for both wall-mounted and ceiling applications, indoors and outdoors. It is available in two colors: white or black.



CODE	L3648HI-B-DET-DD-65
POWER (W)	15W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	300lm
PERMANENT (LM)	2500lm
BATTERY	LI-FEPO4



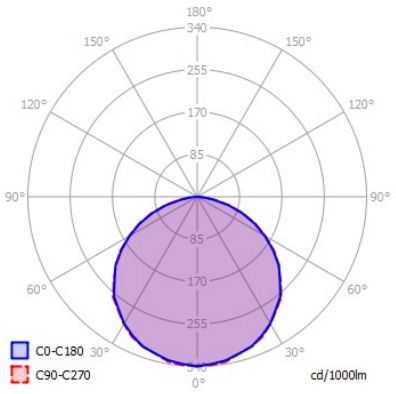

Features

PRODUCT NAME	ALIEN-
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	15W

LINERGY
EMERGENCY LIGHTING

ALIEN-
L3648HI-B-DET-DD-65

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	300lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	2500lm
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V - 1,5Ah
BATTERY RECHARGE TIME (H) :	24H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	POLYCARBONATE OPAL
IMPACT RESISTANCE	IK10
HEIGHT/DEPTH (MM) :	100mm
EXTERNAL DIAMETER (MM) :	335mm
PRODUCT WEIGHT (G) :	1500GR
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE)	34
MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE)	56
NONIMAL LIFETIME L70/B50 (H) :	100.000H
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
COLOUR TEMPERATURE	4000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020523
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	48
EAN	9900000012021
INTRASTAT CODE	85365000

ALIEN-
L3648HI-B-DET-DD-65

COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22
FUNCTION	Ambient and evacuation lighting Lighting with detection
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Autotest Dali Light ON/OFF Security
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent