ALIEN-LED
L3643HI-B-DALI-65


IP54 IK10


ALIEN 15W 3000K 2400lm IP54 WHITE DALI

The Alien LED model, with its round shape, stands out for its high durability. It is suitable for both wall-mounted and ceiling applications, indoors and outdoors. It is available in two colors: white or black.



CODE	L3643HI-B-DALI-65
POWER (W)	15W
AUTONOMY (U)	
TYPE	
RESCUE (LM)	
PERMANENT (LM)	2400lm
BATTERY	



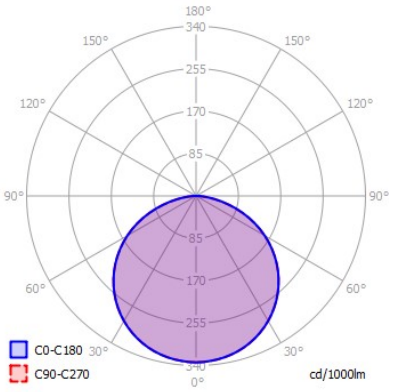

Features

PRODUCT NAME	ALIEN-LED
PRODUCT FUNCTION	HERMETIC LED LIGHTING
SYSTEM POWER (W) :	15W

ALIEN-LED
L3643HI-B-DALI-65


CONTINUOUS MODE LUMINOUS FLOW (LM) :	2400lm
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP54
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	BLANC RAL 9002
MATERIAL OF THE COVER	POLYCARBONATE OPAL
IMPACT RESISTANCE	IK10
HEIGHT/DEPTH (MM) :	100mm
EXTERNAL DIAMETER (MM) :	335mm
PRODUCT WEIGHT (G) :	1500GR
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
VOLTAGE TYPE	AC
MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE)	33
MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE)	55
NONIMAL LIFETIME L70/B50 (H) :	100.000H
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
COLOUR TEMPERATURE	3000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	-
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	0
EAN	9900000009779
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 RoHS2 2011/65/UE
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)

ALIEN-LED
L3643HI-B-DALI-65

LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Dali Light ON/OFF
PROTECTION CLASS	II

Accessories

L3648-B-FRAME - ALIEN WHITE DESIGN FRAME



L3648-N-FRAME - ALIEN BLACK DESIGN FRAME



L99023 - ALIEN PROTECTION GRID

