

ARYA-CONNECT
LAR2901

IP65 12 pcs


ARYA 2,3W 250lm-165lm 1h-3h IP65 M/NM CONNECT WHITE

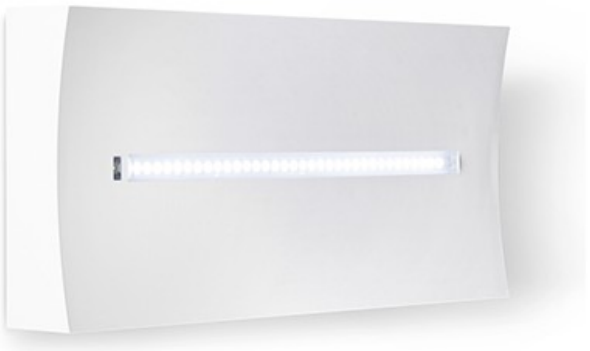

CODE	LAR2901
POWER (W)	2,3W
AUTONOMY (U)	2h
TYPE	Not permanent-Permanent
RESCUE (LM)	250lm-250lm-250lm-165lm
PERMANENT (LM)	250lm
BATTERY	LI-FEPO4



A=240mm B=10mm C=118mm D= 37mm

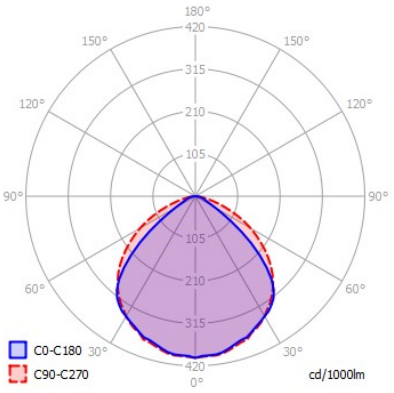

Features

PRODUCT NAME	ARYA-CONNECT
PRODUCT FUNCTION	SMART EMERGENCY LIGHTING
SYSTEM POWER (W) :	2,3W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	250lm-250lm-250lm-165lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	250lm

ARYA-CONNECT
LAR2901

SURVEILLANCE SYSTEM INSTALLATION	SURVEILLANCE CENTRALISEE
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V - 1,5Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	PLASTIQUE OPAQUE
HEIGHT/DEPTH (MM) :	37mm
LENGTH (MM) :	240mm
WIDTH (MM) :	118mm
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	100.000H
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020446
RECUPEL CODE	-
BATTERY WEIGHT (G) :	41
EAN	8021046123463
EAN PACK	8021046350197
INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE

INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Security Wireless/Spy system wireless
NOMINAL OPERATING TIME	2h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99021 - PROTECTION GRID



L99045 - FIXATION 45°



LB087 - BATTERY LIFEPO4 3,2V 1,5AH



LA310-B - 3-PHASE ADAPTER WHITE



L99007 - FLAG FIXATION

