
# ARYA-SMART-PLUS
## LAR3106

IP20 12 pcs


**ARYA 4,8W 600lm 2h IP20 P/NP SMART PLUS BLACK**



| | |
|---|---|
| **CODE** | LAR3106 |
| **POWER (W)** | 4,8W |
| **AUTONOMY (U)** | 2h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 600lm |
| **PERMANENT (LM)** | 600lm |
| **BATTERY** | |




A=240mm B=10mm C=118mm D= 37mm

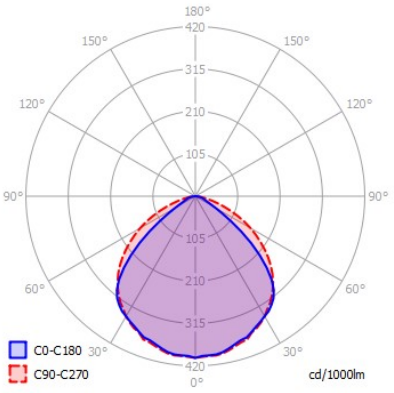


## Features

| | |
|---|---|
| PRODUCT NAME | ARYA-SMART-PLUS |
| PRODUCT FUNCTION | SMART EMERGENCY LIGHTING |
| SYSTEM POWER (W) : | 4,8W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 600lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 600lm |

# ARYA-SMART-PLUS
## LAR3106

| | |
|---|---|
| SURVEILLANCE SYSTEM INSTALLATION | SURVEILLANCE CENTRALISEE |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | LiFePO4 |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP20 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | NOIR |
| MATERIAL OF THE COVER | PLASTIQUE OPAQUE |
| HEIGHT/DEPTH (MM) : | 37mm |
| LENGTH (MM) : | 240mm |
| WIDTH (MM) : | 118mm |
| NUMBER OF PRODUCTS PER BOX | 12 |
| INCANDESCENT WIRE 850°C | OUI |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 100.000H |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020590 |
| RECUPEL CODE | - |
| BATTERY WEIGHT (G) : | 81 gr. |
| EAN | 9900000005054 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 60598-1<br>EN 60598-2-22<br>EN 61347-1<br>EN 61347-2-13<br>EN 61347-2-7<br>EN 62031<br>EN 62384<br>RoHS2 2011/65/UE |
| INSTALLATION METHOD | Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |

# ARYA-SMART-PLUS
## LAR3106

| | |
|---|---|
| MODE | Air quality sensor<br>Security<br>Wireless/Spy system wireless |
| NOMINAL OPERATING TIME | 2h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**L99021** - PROTECTION GRID



**LA310-B** - 3-PHASE ADAPTER WHITE



**L99045** - FIXATION 45°



**LB087** - BATTERY LIFEPO4 3,2V 1,5AH



**L99007** - FLAG FIXATION

