LINERGY
EMERGENCY LIGHTING

# ASTRA
# L1301-N


IP40 IK06 3 pcs

**ASTRA 2,9W 22m 1/2/3h M/NM AUT BLACK**


The LUCY model, specifically designed for performance spaces and cinemas. Its battery life is adjustable to meet various needs. The model is available in two sizes and comes in black (optional).



| | |
|---|---|
| **CODE** | L1301-N |
| **POWER (W)** | 2,9W |
| **AUTONOMY (U)** | 1h |
| | 3h |
| **TYPE** | |
| **RESCUE (LM)** | |
| **PERMANENT (LM)** | |
| **BATTERY** | LI-FEPO4 |

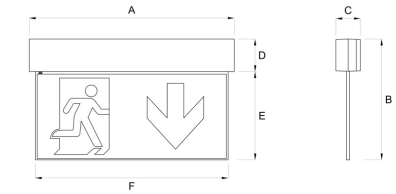


A=271mm B=167mm C=33mm D=43mm E=123mm F=255mm




## Features

| | |
|---|---|
| PRODUCT NAME | ASTRA |
| PRODUCT FUNCTION | LUMINAIRES DE SIGNALISATION LED NON HERMETIQUES |
| SYSTEM POWER (W) : | 2,9W |
| SIGHT DISTANCE (M) : | 22M |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |

| | |
|---|---|
| BATTERY | Li-FeP04 3,2V - 1,5Ah |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP40 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | NOIR RAL 9005 |
| MATERIAL OF THE COVER | TRANSPARENTE PLASTIC |
| IMPACT RESISTANCE | IK06 |
| HEIGHT/DEPTH (MM) : | 33mm |
| LENGTH (MM) : | 271mm |
| WIDTH (MM) : | 123mm |
| MOUNTING WIDTH | 271mm |
| PRODUCT WEIGHT (G) : | 500GR |
| NUMBER OF PRODUCTS PER BOX | 3 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| INCLUDED PICTOGRAMS | OUI |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020446 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 41 |
| INTRASTAT CODE | 85365000 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>EN 62034<br>RoHS2 2011/65/UE |
| FUNCTION | Evacuation lighting |

| | |
|---|---|
| INSTALLATION METHOD | Built-in<br>Chain<br>Flag mounting<br>Hanging<br>Surface mounted recessed<br>Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Autotest |
| NOMINAL OPERATING TIME | 1h<br>3h |
| PROTECTION CLASS | II |
| TYPE OF PICTOGRAM | Acrylic glass plate |

## Accessories

**L91041-22** - PICTO ASTRA DOWN 22M



**L92019-B-AS** - ASTRA RECESSED KIT WHITE



**L92019-G-AS** - ASTRA RECESSED KIT GREY



**L92020-AS** - SUSPENSION KIT ASTRA



**LA081** - ASTRA SUPPORT FOR WALL, CEILING AND FLAG FIXATION



**L99020-22-AS** - ASTRA SET OF 5 PICTOGRAMS 22m



**L99025** - LEXIT/ASTRA PROTECTION GRID



**L99150** - COMMANDER



**LA252** - ASTRA CONNEXION KIT (CABLE/CONNECTOR) STANDARD TYPE



**LA330** - ASTRA CONNEXION KIT (CABLE/CONNECTOR)

