
# ATEX-
# L25550-LED

IP66 IK08


## ATEX EEX 1,4W 250lm 3h M/NM IP66



| | |
|---|---|
| **CODE** | L25550-LED |
| **POWER (W)** | 1,4W |
| **AUTONOMY (U)** | 3h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 250lm |
| **PERMANENT (LM)** | 250lm |
| **BATTERY** | LI-FEPO4 |

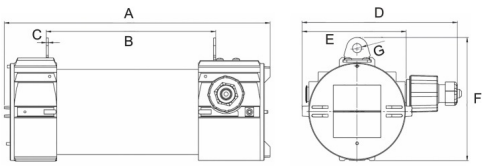


A=368mm B=234mm C=3mm
D=216mm E=155mm F=174mm G=Ø13mm

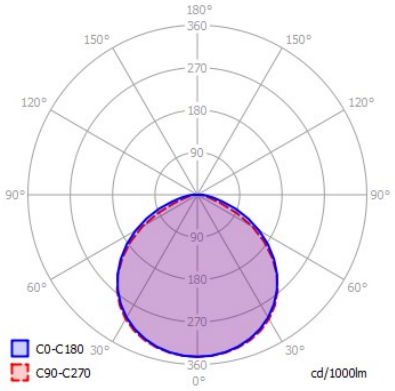


## Features

| | |
|---|---|
| PRODUCT NAME | ATEX- |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED HERMÉTIQUES |
| SYSTEM POWER (W) : | 1,4W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 250lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 250lm |

# ATEX-L25550-LED

| | |
|---|---|
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | LiFePO4 |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP66 |
| HOUSING MATERIAL | VERRE BOROSILICATE |
| HOUSING COLOUR | GREY RAL 9007 |
| MATERIAL OF THE COVER | VERRE TRANSPARENT |
| IMPACT RESISTANCE | IK08 |
| HEIGHT/DEPTH (MM) : | 174mm |
| LENGTH (MM) : | 370mm |
| WIDTH (MM) : | 147mm |
| MOUNTING WIDTH | 370mm |
| PRODUCT WEIGHT (G) : | 4000GR |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | -20°C / +50°C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| EQUIPMENT CERTIFIED FOR EXPLOSIVE ATMOSPHERES | OUI |
| BEBAT CODE | B110020590 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 86 gr. |
| EAN | 8021046121766 |
| EXPLOSION PROTECTION | Ex II 2 G - Ex d IIC T6 Gb -20°C / +50°C - Ex II 2 G - Ex de IIC T6 Gb -20°C / +50°C - Ex II 2 D - C |
| INTRASTAT CODE | 85365000 |

| | |
|---|---|
| COMPLIANT WITH EUROPEAN STANDARDS | EN 60598-1<br>EN 60598-2-22<br>EN 62031<br>EN 62034<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient lighting (anti-panic) |
| INSTALLATION METHOD | Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Security |
| NOMINAL OPERATING TIME | 3h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**LA311** - TWINLIGHT PICTO LEFT



**LA312** - TWINLIGHT PICTO RIGHT



**LA313** - TWINLIGHT PICTO DOWN

