CRISTAL-EVO
L52350-DALI


IP65 IK08 6 pcs

CRISTAL EVO 5,50W 560lm 1h IP65 M/NM DALI


The Cristal EVO is ideal for large indoor and outdoor spaces. Its aesthetic mirror frame gives it a beautiful elegance, and its luminous performance can reach up to 1600lm.



CODE	L52350-DALI
POWER (W)	5,5W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	560lm
PERMANENT (LM)	560lm
BATTERY	LI-FEPO4

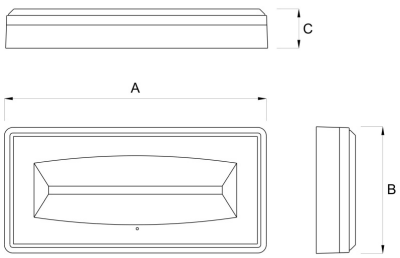

A=380mm B=180mm C=58mm

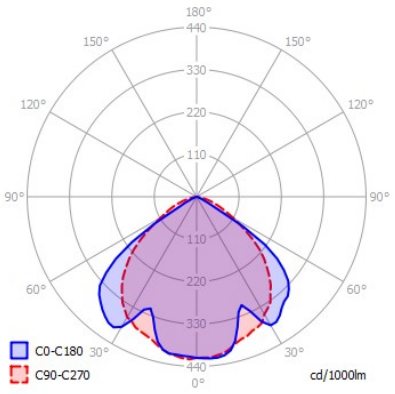

Features

PRODUCT NAME	CRISTAL-EVO
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	5,5W

CRISTAL-EVO
L52350-DALI

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	560lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	560lm
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	58mm
LENGTH (MM) :	380mm
WIDTH (MM) :	180mm
MOUNTING WIDTH	380mm
PRODUCT WEIGHT (G) :	1100GR
NUMBER OF PRODUCTS PER BOX	6
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020921
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	63 gr.
EAN	8021046117431
EAN PACK	8021046328455

COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 EN 62386-101 EN 62386-102 EN 62386-202 EN 62386-207 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Flag mounting Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Dali Security
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L92023 - CRISTAL SUSPENDED PLEXI KIT 

L92024 - CRISTAL FLUSH-MOUNTING BOX 

L99004 - STEP & CRISTAL & PRODIGY XL SET FOR RECESSED 

LA328 - CRISTAL EVO RAIN PROTECTION INOX 

L91001 - PICTO ADHESIVE 300mm X 100mm LEFT 

L91002 - PICTO ADHESIVE 300mm X 100mm RICHT 

L91003 - PICTO ADHESIVE 300mm X 100mm DOWN 

L91009 - PICTO ADHESIVE 300mm X 100mm EXIT 

L99045 - FIXATION 45°



L99010 - CABLE ENTRY



L99150 - COMMANDER

