# CRISTAL-EVO
## L52801


IP65 IK08 6 pcs

**CRISTAL EVO 9,20W 1055lm 1h IP65 M/NM**


The Cristal EVO is ideal for large indoor and outdoor spaces. Its aesthetic mirror frame gives it a beautiful elegance, and its luminous performance can reach up to 1600lm.



| | |
|---|---|
| **CODE** | L52801 |
| **POWER (W)** | 9,2W |
| **AUTONOMY (U)** | 1h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 1055lm |
| **PERMANENT (LM)** | 1055lm |
| **BATTERY** | LI-FEPO4 |

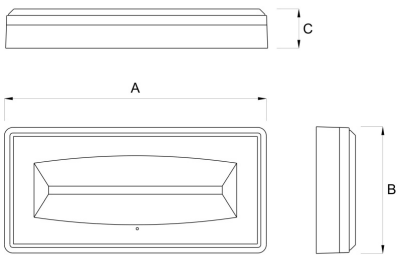


A=380mm B=180mm C=58mm

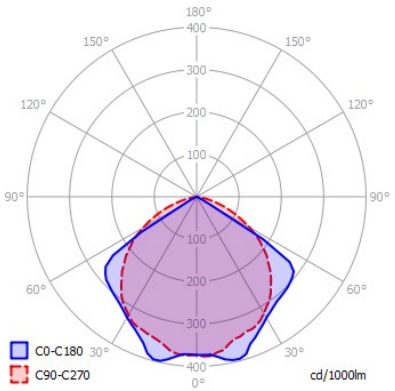


## Features

| | |
|---|---|
| PRODUCT NAME | CRISTAL-EVO |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED HERMÉTIQUES |
| SYSTEM POWER (W) : | 9,2W |

# CRISTAL-EVO
## L52801

| | |
|---|---|
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 1055lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 1055lm |
| SURVEILLANCE SYSTEM INSTALLATION | SURVEILLANCE CENTRALISEE |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| WITH REMOTE CONTROL (COMMANDER) | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | LiFePO4 |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP65 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | WHITE RAL 9003 |
| MATERIAL OF THE COVER | TRANSPARENTE PLASTIC |
| IMPACT RESISTANCE | IK08 |
| HEIGHT/DEPTH (MM) : | 58mm |
| LENGTH (MM) : | 380mm |
| WIDTH (MM) : | 180mm |
| MOUNTING WIDTH | 380mm |
| PRODUCT WEIGHT (G) : | 1100GR |
| NUMBER OF PRODUCTS PER BOX | 6 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| ENEC | YES |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020921 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 63 gr. |
| EAN | 8021046117950 |
| EAN PACK | 8021046328974 |

| | |
|---|---|
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>EN 61347-1<br>EN 61347-2-13<br>EN 61347-2-7<br>EN 62031<br>EN 62384<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic) |
| INSTALLATION METHOD | Flag mounting<br>Surface mounted recessed<br>Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Bus/spy system<br>Security |
| NOMINAL OPERATING TIME | 1h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**L92023** - CRISTAL SUSPENDED PLEXI KIT



**L92024** - CRISTAL FLUSH-MOUNTING BOX



**L99004** - STEP & CRISTAL & PRODIGY XL SET FOR RECESSED



**LA328** - CRISTAL EVO RAIN PROTECTION INOX



**L91001** - PICTO ADHESIVE 300mm X 100mm LEFT



**L91002** - PICTO ADHESIVE 300mm X 100mm RICHT



**L91003** - PICTO ADHESIVE 300mm X 100mm DOWN



**L91009** - PICTO ADHESIVE 300mm X 100mm EXIT



**L99045** - FIXATION 45°



**L99010** - CABLE ENTRY



**L99150** - COMMANDER

