CRISTAL-WALL
L53800W


IP65 IK08 6 pcs

CRISTAL WALL 13,50W 1200lm IP65 SPY CENTER


The Cristal EVO is ideal for large indoor and outdoor spaces. Its aesthetic mirror frame gives it a beautiful elegance, and its luminous performance can reach up to 1600lm.



CODE	L53800W
POWER (W)	13,5W
AUTONOMY (U)	
TYPE	
RESCUE (LM)	1200lm
PERMANENT (LM)	1200lm
BATTERY	

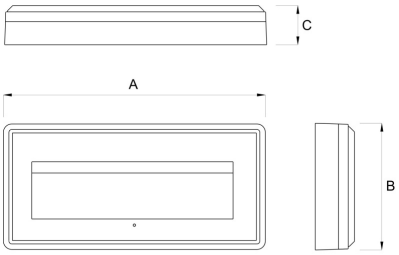

A=380mm B=180mm C=58mm

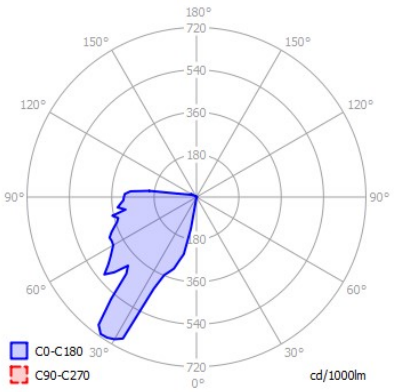

Features

PRODUCT NAME	CRISTAL-WALL
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	13,5W

CRISTAL-WALL
L53800W

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	1200lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	1200lm
SURVEILLANCE SYSTEM INSTALLATION	SURVEILLANCE CENTRALISEE
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	58mm
LENGTH (MM) :	380mm
WIDTH (MM) :	180mm
MOUNTING WIDTH	380mm
PRODUCT WEIGHT (G) :	1300GR
NUMBER OF PRODUCTS PER BOX	6
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	-
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	0
COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting
INSTALLATION METHOD	Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector

MODE	Centralized battery Security
PROTECTION CLASS	II
TYPE OF PICTOGRAM	Acrylic glass plate