
DUNA
L1528-DET-3K


DUNA LED 23/43W 3000K 3950/6700lm IP66 + SENSOR

The DUNA is an airtight polycarbonate diffuser specifically designed to provide perfectly uniform LED lighting while delivering optimal luminous performance. It can be equipped with cross wiring.



CODE	L1528-DET-3K
POWER (W)	23W-29W-36W-43W
AUTONOMY (U)	
TYPE	
RESCUE (LM)	
PERMANENT (LM)	3950lm-4900lm-5800lm-6700lm
BATTERY	



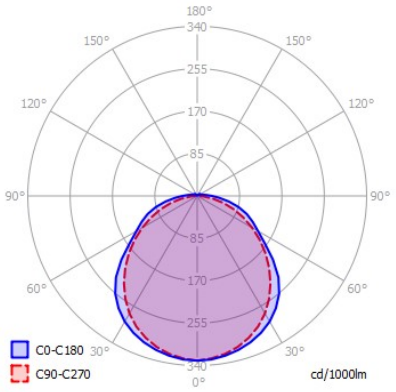

Features

PRODUCT NAME	DUNA
PRODUCT FUNCTION	HERMETIC LED LIGHTING
SYSTEM POWER (W) :	23W-29W-36W-43W

DUNA
L1528-DET-3K

CONSUMPTION POWER (ABSORPTION)	23W-43W
CONTINUOUS MODE LUMINOUS FLOW (LM) :	3950lm-4900lm-5800lm-6700lm
NONIMAL LIFETIME L70/B50 (H) :	100.000H (L70/B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
COLOUR TEMPERATURE	3000K
BEBAT CODE	-
RECUPEL CODE	4.56
BATTERY WEIGHT (G) :	0
EAN	9900000003975
INTRASTAT CODE	85394900
COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22
FUNCTION	Lighting with detection Twilight
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Light ON/OFF
PROTECTION CLASS	I

Accessories

LDUNA-TRANS3P - DUNA TRANSVERSE WIRING 3P



LDUNA-TRANS5P - DUNA TRANSVERSE WIRING 5P



LATE002 - MALE CONNECTOR WIELAND RST20I5S



LATE003 - CONNECTOR FEMALE WIELAND RST20I5S



L6100 - 2-PIECE ANTI-VANDALISM MOUNTING

