# DUNA
# L1528-SE-DET-DALI


IP66 IK08


**DUNA LED 23/43W 4000K 3950/6700lm - 900lm IP66 1h SENSOR + EMERGENCY DALI**

The DUNA is an airtight polycarbonate diffuser specifically designed to provide perfectly uniform LED lighting while delivering optimal luminous performance. It can be equipped with cross wiring.



| | |
|---|---|
| **CODE** | L1528-SE-DET-DALI |
| **POWER (W)** | 23W-29W-36W-43W |
| **AUTONOMY (U)** | 1h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 900lm |
| **PERMANENT (LM)** | 3950lm-4900lm-5800lm-6700lm |
| **BATTERY** | LI-FEPO4 |



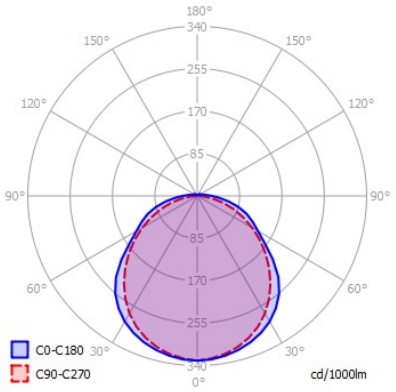
## Features

| | |
|---|---|
| PRODUCT NAME | DUNA |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED HERMÉTIQUES |
| SYSTEM POWER (W) : | 23W-29W-36W-43W |

LINERGY
EMERGENCY LIGHTING

# DUNA
# L1528-SE-DET-DALI

| | |
|---|---|
| CONSUMPTION POWER (ABSORPTION) | 23W-43W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 900lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 3950lm-4900lm-5800lm-6700lm |
| SURVEILLANCE SYSTEM INSTALLATION | DALI |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | Li-FeP04 3,2V 3Ah |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP66 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | GRIS RAL 7035 |
| MATERIAL OF THE COVER | PMMA PROTECTION UV 20% OPALE |
| IMPACT RESISTANCE | IK08 |
| HEIGHT/DEPTH (MM) : | 84mm |
| LENGTH (MM) : | 1573mm |
| WIDTH (MM) : | 101mm |
| MOUNTING WIDTH | 1100mm |
| PRODUCT WEIGHT (G) : | 3400GR |
| INCANDESCENT WIRE 850°C | OUI |
| WIRING TYPE | ADAPTE A UN CÂBLAGE TRANVERSANT |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE) | 40 |
| MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE) | 40 |
| NONIMAL LIFETIME L70/B50 (H) : | 100.000H (L70/B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | -5°C / +55°C |
| COLOUR TEMPERATURE | 4000K |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020590 |
| RECUPEL CODE | 4.56 |
| BATTERY WEIGHT (G) : | 88 gr. |

# DUNA
# L1528-SE-DET-DALI

| | |
|---|---|
| EAN | 9900000000448 |
| INTRASTAT CODE | 85365000 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22 |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic)<br>Lighting with detection<br>Twilight |
| INSTALLATION METHOD | Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Dali<br>Light ON/OFF<br>Security |
| NOMINAL OPERATING TIME | 1h |
| PROTECTION CLASS | I |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**LDUNA-TRANS3P** - DUNA TRANSVERSE WIRING 3P



**LDUNA-TRANS5P** - DUNA TRANSVERSE WIRING 5P



**LATE002** - MALE CONNECTOR WIELAND RST20I5S



**LATE003** - CONNECTOR FEMALE WIELAND RST20I5S



**L6100** - 2-PIECE ANTI-VANDALISM MOUNTING

