DUNA
L1528HI-SE-DET-WIR


IP66 IK08


DUNA LED 56/70W 4000K 8850/10750lm - 2100lm IP66 1h SENSOR + EMERGENCY WIRELESS

The DUNA is an airtight polycarbonate diffuser specifically designed to provide perfectly uniform LED lighting while delivering optimal luminous performance. It can be equipped with cross wiring.



CODE	L1528HI-SE-DET-WIR
POWER (W)	56W-61W-66W-70W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	2100lm
PERMANENT (LM)	8850lm - 9500lm - 10100lm - 10750lm
BATTERY	LI-FEPO4



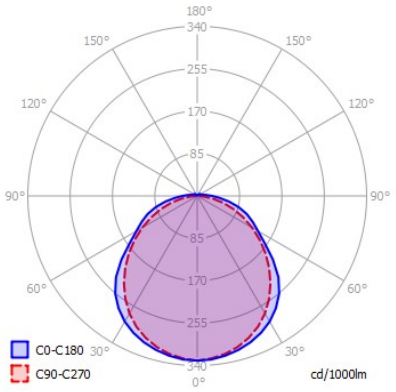

Features

PRODUCT NAME	DUNA
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	56W-61W-66W-70W

LINERGY
EMERGENCY LIGHTING

DUNA
L1528HI-SE-DET-WIR

CONSUMPTION POWER (ABSORPTION)	56W-70W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	2100lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	8850lm - 9500lm - 10100lm - 10750lm
SURVEILLANCE SYSTEM INSTALLATION	WIRELESS
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V 3Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP66
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	GRIS RAL 7035
MATERIAL OF THE COVER	PMMA PROTECTION UV 20% OPALE
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	84mm
LENGTH (MM) :	1573mm
WIDTH (MM) :	101mm
MOUNTING WIDTH	1100mm
PRODUCT WEIGHT (G) :	3200GR
INCANDESCENT WIRE 850°C	OUI
WIRING TYPE	ADAPTE A UN CÂBLAGE TRANVERSANT
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE)	19
MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE)	30
NONIMAL LIFETIME L70/B50 (H) :	100.000H (L70/B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
COLOUR TEMPERATURE	4000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020590
RECUPEL CODE	4.56
BATTERY WEIGHT (G) :	88 gr.

DUNA
L1528HI-SE-DET-WIR

EAN	9900000002886
INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic) Lighting with detection Twilight
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Light ON/OFF Security Wireless/Spy system wireless
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	I
TYPE OF SWITCHING	Not permanent Permanent

Accessories

LDUNA-TRANS3P - DUNA TRANSVERSE WIRING 3P



LDUNA-TRANS5P - DUNA TRANSVERSE WIRING 5P



LATE002 - MALE CONNECTOR WIELAND RST20I5S



LATE003 - CONNECTOR FEMALE WIELAND RST20I5S



L6100 - 2-PIECE ANTI-VANDALISM MOUNTING

