
DUNA
L1528HI-SE-PLATINE


DUNA LED 56/70W 4000K 8850/10750lm - 2100lm IP66 1h + EMERGENCY PLATINE

The DUNA is an airtight polycarbonate diffuser specifically designed to provide perfectly uniform LED lighting while delivering optimal luminous performance. It can be equipped with cross wiring.



CODE	L1528HI-SE-PLATINE
POWER (W)	56W-61W-66W-70W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	2100lm
PERMANENT (LM)	8850lm - 9500lm - 10100lm - 10750lm
BATTERY	LI-FEPO4



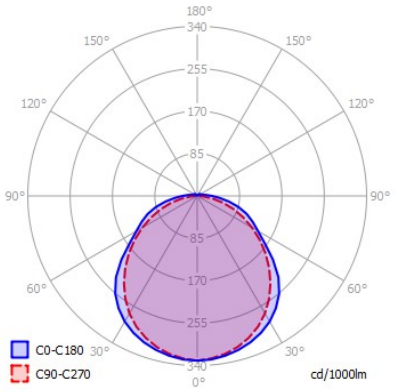

Features

PRODUCT NAME	DUNA
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	56W-61W-66W-70W

DUNA
L1528HI-SE-PLATINE

CONSUMPTION POWER (ABSORPTION)	56W-70W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	2100lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	8850lm - 9500lm - 10100lm - 10750lm
BATTERY	Li-FeP04 3,2V 3Ah
BATTERY STATUS	LI-FEPO4
NONIMAL LIFETIME L70/B50 (H) :	100.000H (L70/B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
COLOUR TEMPERATURE	4000K
BEBAT CODE	B207035040
RECUPEL CODE	4.56
BATTERY WEIGHT (G) :	88 gr.
EAN	9900000004040
INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22
FUNCTION	Ambient and evacuation lighting
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Light ON/OFF Security
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	I
TYPE OF SWITCHING	Not permanent Permanent

Accessories

LDUNA-TRANS3P - DUNA TRANSVERSE WIRING 3P



LDUNA-TRANS5P - DUNA TRANSVERSE WIRING 5P



LATE002 - MALE CONNECTOR WIELAND RST20I5S



LATE003 - CONNECTOR FEMALE WIELAND RST20I5S



L6100 - 2-PIECE ANTI-VANDALISM MOUNTING

