DUNA
L1528HI-3K


IP66 IK08


DUNA LED 56/70W 3000K 8850/10750lm IP66

The DUNA is an airtight polycarbonate diffuser specifically designed to provide perfectly uniform LED lighting while delivering optimal luminous performance. It can be equipped with cross wiring.



CODE	L1528HI-3K
POWER (W)	56W-61W-66W-70W
AUTONOMY (U)	
TYPE	
RESCUE (LM)	
PERMANENT (LM)	8850lm - 9500lm - 10100lm - 10750lm
BATTERY	



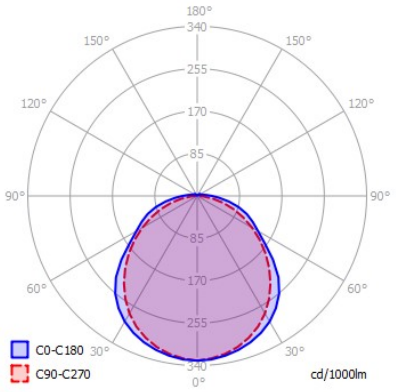

Features

PRODUCT NAME	DUNA
PRODUCT FUNCTION	HERMETIC LED LIGHTING
SYSTEM POWER (W) :	56W-61W-66W-70W

LINERGY EMERGENCY LIGHTING

DUNA
L1528HI-3K

CONSUMPTION POWER (ABSORPTION)	56W-70W
CONTINUOUS MODE LUMINOUS FLOW (LM) :	8850lm - 9500lm - 10100lm - 10750lm
SURVEILLANCE SYSTEM INSTALLATION	SANS
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V - 1,5Ah
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP66
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	GRIS RAL 7035
MATERIAL OF THE COVER	PMMA PROTECTION UV 20% OPALE
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	84mm
LENGTH (MM) :	1573mm
WIDTH (MM) :	101mm
MOUNTING WIDTH	1100mm
PRODUCT WEIGHT (G) :	3200GR
INCANDESCENT WIRE 850°C	OUI
WIRING TYPE	ADAPTE A UN CÂBLAGE TRANVERSANT
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
VOLTAGE TYPE	AC
MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE)	19
MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE)	30
NONIMAL LIFETIME L70/B50 (H) :	100.000H (L70/B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
COLOUR TEMPERATURE	3000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	-
RECUPEL CODE	4.56
BATTERY WEIGHT (G) :	0
EAN	9900000000479
INTRASTAT CODE	85394900

COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Light ON/OFF Standard
PROTECTION CLASS	I

Accessories

LDUNA-TRANS3P - DUNA TRANSVERSE WIRING 3P



LDUNA-TRANS5P - DUNA TRANSVERSE WIRING 5P



LATE002 - MALE CONNECTOR WIELAND RST20I5S



LATE003 - CONNECTOR FEMALE WIELAND RST20I5S



L6100 - 2-PIECE ANTI-VANDALISM MOUNTING

