DUNA
L1528HI-SE-DET-6.5K


IP66 IK08


DUNA LED 56/70W 6500K 8850/10750lm - 2100lm IP66 1h SENSOR + EMERGENCY

The DUNA is an airtight polycarbonate diffuser specifically designed to provide perfectly uniform LED lighting while delivering optimal luminous performance. It can be equipped with cross wiring.



CODE	L1528HI-SE-DET-6.5K
POWER (W)	56W-61W-66W-70W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	2100lm
PERMANENT (LM)	8850lm - 9500lm - 10100lm - 10750lm
BATTERY	LI-FEPO4



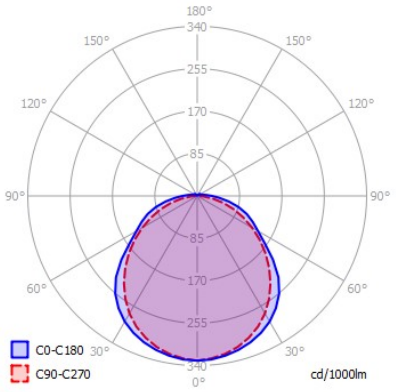

Features

PRODUCT NAME	DUNA
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	56W-61W-66W-70W

LINERGY
EMERGENCY LIGHTING

DUNA
L1528HI-SE-DET-6.5K

CONSUMPTION POWER (ABSORPTION)	56W-70W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	2100lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	8850lm - 9500lm - 10100lm - 10750lm
SURVEILLANCE SYSTEM INSTALLATION	SANS
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V - 1,5Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP66
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	GRIS RAL 7035
MATERIAL OF THE COVER	PMMA PROTECTION UV 20% OPALE
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	84mm
LENGTH (MM) :	1573mm
WIDTH (MM) :	101mm
MOUNTING WIDTH	1100mm
PRODUCT WEIGHT (G) :	3200GR
INCANDESCENT WIRE 850°C	OUI
WIRING TYPE	ADAPTE A UN CÂBLAGE TRANVERSANT
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE)	19
MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE)	30
NONIMAL LIFETIME L70/B50 (H) :	100.000H (L70/B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
COLOUR TEMPERATURE	4000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020590
RECUPEL CODE	4.56
BATTERY WEIGHT (G) :	88 gr.

DUNA
L1528HI-SE-DET-6.5K

EAN	9900000011727
INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic) Lighting with detection Twilight
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Light ON/OFF Security
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	I
TYPE OF SWITCHING	Not permanent Permanent

Accessories

LDUNA-TRANS3P - DUNA TRANSVERSE WIRING 3P



LDUNA-TRANS5P - DUNA TRANSVERSE WIRING 5P



LATE002 - MALE CONNECTOR WIELAND RST20I5S



LATE003 - CONNECTOR FEMALE WIELAND RST20I5S



L6100 - 2-PIECE ANTI-VANDALISM MOUNTING

