LINERGY
EMERGENCY LIGHTING


# DUO
# LDU1305


CE IP42 IK07

## DUO WHITE MICTO UM 5W 500lm IP42 2h M AUT



| | |
|---|---|
| **CODE** | LDU1305 |
| **POWER (W)** | 5W |
| **AUTONOMY (U)** | 2h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 500lm |
| **PERMANENT (LM)** | |
| **BATTERY** | LI-FEPO4 |

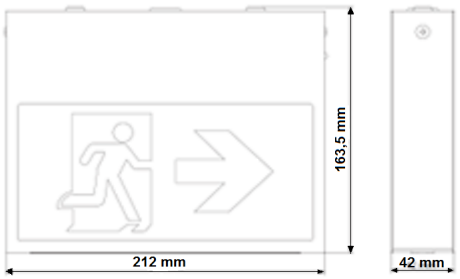


## Features

| | |
|---|---|
| PRODUCT NAME | DUO |
| PRODUCT FUNCTION | EMERGENCY AND SIGNAL LIGHTING |
| SYSTEM POWER (W) : | 5W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 500lm |
| SIGHT DISTANCE (M) : | 22M |
| WITH CONNECTION TO A IMPULSE RELAY | NON |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | Li-FeP04 3,2V 3,2Ah |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |

| | |
|---|---|
| PROTECTION CLASS | IP42 |
| HOUSING MATERIAL | ACIER PUR À FAIBLE TENEUR EN CARBONE |
| HOUSING COLOUR | WHITE RAL 9003 |
| MATERIAL OF THE COVER | TRANSPARENTE PLASTIC |
| IMPACT RESISTANCE | IK07 |
| HEIGHT/DEPTH (MM) : | 42mm |
| LENGTH (MM) : | 212mm |
| WIDTH (MM) : | 163,5mm |
| MOUNTING WIDTH | 212mm |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| INCLUDED PICTOGRAMS | OUI |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B207035090 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 90 gr. |
| EAN | 9900000002527 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>EN 62034 |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic)<br>Evacuation lighting |
| INSTALLATION METHOD | Flag mounting<br>Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Autotest<br>Security |
| NOMINAL OPERATING TIME | 2h |

| | |
|---|---|
| PICTOGRAM VISIBILITY | Double-sided<br>Only on one side |
| PROTECTION CLASS | I |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**LA602** - DUO SUPPORT FOR WALL FIXATION 

**LA601** - DUO SUPPORT FOR FLAG FIXATION 