LINERGY
EMERGENCY LIGHTING


DUO
LDU1314


IP42 IK07

DUO BLACK PICTO FIRE EXTINGUISHER 5W 2h P AUT



CODE	LDU1314
POWER (W)	5W
AUTONOMY (U)	2h
TYPE	Not permanent-Permanent
RESCUE (LM)	500lm
PERMANENT (LM)	
BATTERY	LI-FEPO4

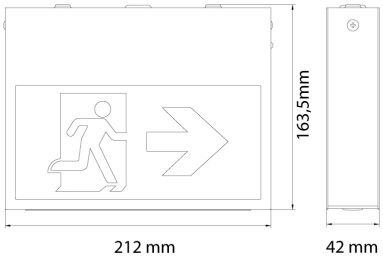



Features

PRODUCT NAME	DUO
PRODUCT FUNCTION	EMERGENCY AND SIGNAL LIGHTING
SYSTEM POWER (W) :	5W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	500lm
SIGHT DISTANCE (M) :	22M
SURVEILLANCE SYSTEM INSTALLATION	AUTO-TEST AUTOMATIQUE
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V 3,2Ah
BATTERY RECHARGE TIME (H) :	12H

LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	ACIER PUR À FAIBLE TENEUR EN CARBONE
HOUSING COLOUR	NOIR RAL 9005
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	42mm
LENGTH (MM) :	212mm
WIDTH (MM) :	163,5mm
MOUNTING WIDTH	212mm
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
INCLUDED PICTOGRAMS	OUI
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B207035090
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	90 gr.
EAN	9900000004224
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 62034
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic) Evacuation lighting
INSTALLATION METHOD	Flag mounting Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector

MODE	Autotest Security
NOMINAL OPERATING TIME	2h
PICTOGRAM VISIBILITY	Double-sided Only on one side
PROTECTION CLASS	I
TYPE OF SWITCHING	Not permanent Permanent

Accessories

LA602 - DUO SUPPORT FOR WALL FIXATION

LA601 - DUO SUPPORT FOR FLAG FIXATION 