FLAG
LFG1502


IP40 4 pcs

FLAG 1,9W 30m 120lm 3h P/NP SPY SYSTEM


The Flag model is made of a sleek anodized aluminum body and 56 white LEDs, providing high brightness. It harmoniously combines its two functions: Emergency & Signaling.



CODE	LFG1502
POWER (W)	3,5W
AUTONOMY (U)	3h
TYPE	Not permanent- Permanent
RESCUE (LM)	120lm
PERMANENT (LM)	
BATTERY	LI-FEPO4

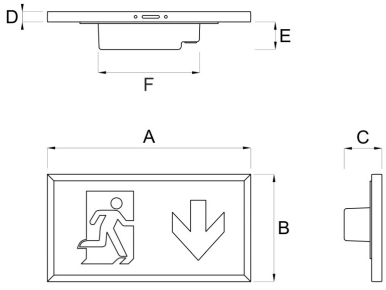

A=317mm B=168mm C=60mm
D=16mm E=43mm F=159mm



Features

PRODUCT NAME	FLAG
PRODUCT FUNCTION	EMERGENCY AND SIGNAL LIGHTING
SYSTEM POWER (W) :	3,5W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	120lm
SIGHT DISTANCE (M) :	30M
SURVEILLANCE SYSTEM INSTALLATION	SURVEILLANCE CENTRALISEE
POWER SUPPLY (V) :	220-230V

LINERGY
EMERGENCY LIGHTING

FLAG
LFG1502

BATTERY	Li-FePO4 6,4V - 1,5Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP40
HOUSING MATERIAL	FONTE D'ALUMINIUM
HOUSING COLOUR	GREY RAL 9006
HEIGHT/DEPTH (MM) :	60mm
LENGTH (MM) :	317mm
MOUNTING WIDTH	168mm
PRODUCT WEIGHT (G) :	1500GR
NUMBER OF PRODUCTS PER BOX	4
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
INCLUDED PICTOGRAMS	OUI
VOLTAGE TYPE	AC
RATED VOLTAGE	230V
NONIMAL LIFETIME L70/B50 (H) :	100.000H
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
COLOUR TEMPERATURE	6000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
BEBAT CODE	B207035090
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	45 gr.
EAN	8021046121865
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting
INSTALLATION METHOD	Surface mounting (wall)
LIGHT DISTRIBUTION ELEMENT	Diffuser
MODE	Bus/spy system Security
NOMINAL OPERATING TIME	3h
PICTOGRAM VISIBILITY	Only on one side
PROTECTION CLASS	I
TYPE OF PICTOGRAM	Placed sheet/plate

TYPE OF SWITCHING	Not permanent Permanent

Accessories

LA323 - FLAG WALL FIXATION



L99020-30-FG - FLAG KIT OF PICTOS



L99150 - COMMANDER

