# FLAG
LFG2401


IP40 4 pcs

**FLAG 3,6W 30m 120lm 1h P WIRELESS**


The Flag model is made of a sleek anodized aluminum body and 56 white LEDs, providing high brightness. It harmoniously combines its two functions: Emergency & Signaling.



| | |
|---|---|
| **CODE** | LFG2401 |
| **POWER (W)** | 3,5W |
| **AUTONOMY (U)** | 1h |
| **TYPE** | Permanent |
| **RESCUE (LM)** | 120lm |
| **PERMANENT (LM)** | |
| **BATTERY** | LI-FEPO4 |

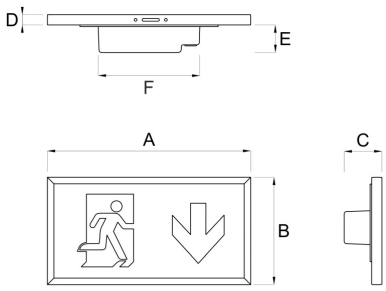


A=317mm B=168mm C=60mm
D=16mm E=43mm F=159mm




## Features

| | |
|---|---|
| PRODUCT NAME | FLAG |
| PRODUCT FUNCTION | EMERGENCY AND SIGNAL LIGHTING |
| SYSTEM POWER (W) : | 3,5W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 120lm |
| SIGHT DISTANCE (M) : | 30M |
| SURVEILLANCE SYSTEM INSTALLATION | WIRELESS |
| POWER SUPPLY (V) : | 220-230V |

LINERGY
EMERGENCY LIGHTING

# FLAG
# LFG2401

| | |
|---|---|
| BATTERY | Li-FePO4 6,4V - 1,5Ah |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP40 |
| HOUSING MATERIAL | FONTE D'ALUMINIUM |
| HOUSING COLOUR | GREY RAL 9006 |
| HEIGHT/DEPTH (MM) : | 60mm |
| LENGTH (MM) : | 317mm |
| MOUNTING WIDTH | 168mm |
| PRODUCT WEIGHT (G) : | 1500GR |
| NUMBER OF PRODUCTS PER BOX | 4 |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| INCLUDED PICTOGRAMS | OUI |
| VOLTAGE TYPE | AC |
| RATED VOLTAGE | 230V |
| NONIMAL LIFETIME L70/B50 (H) : | 100.000H |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| COLOUR TEMPERATURE | 6000K |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B207035090 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 45 gr. |
| EAN | 8021046121896 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting |
| INSTALLATION METHOD | Surface mounting (wall) |
| LIGHT DISTRIBUTION ELEMENT | Diffuser |
| MODE | Security<br>Wireless/Spy system wireless |
| NOMINAL OPERATING TIME | 1h |
| PICTOGRAM VISIBILITY | Only on one side |

| | |
|---|---|
| PROTECTION CLASS | I |
| TYPE OF PICTOGRAM | Placed sheet/plate |
| TYPE OF SWITCHING | Permanent |

## Accessories

**LA323** - FLAG WALL FIXATION



**L99020-30-FG** - FLAG KIT OF PICTOS



**L99150** - COMMANDER

