LED-INVERTER
L88031HI-WIR


IP20 16 pcs

LED INVERTER HIGH VOLTAGE 4W 1h 250V WIRELESS

The LED INVERTER kit allows you to convert a regular LED fixture into an emergency LED light. In case of a power failure, the light will turn on with emergency output



CODE	L88031HI-WIR
POWER (W)	4W
AUTONOMY (U)	1h
TYPE	
RESCUE (LM)	
PERMANENT (LM)	
BATTERY	LI-FEPO4

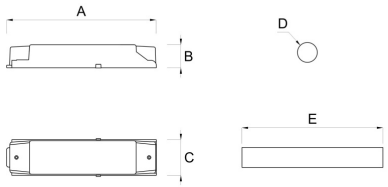

A=175mm B=27mm C=46mm
D=Ø19mm E=135mm

Features

PRODUCT NAME	LED-INVERTER
PRODUCT FUNCTION	KITS DE SECOURS
SYSTEM POWER (W) :	4W

LED-INVERTER
L88031HI-WIR

SURVEILLANCE SYSTEM INSTALLATION	WIRELESS
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP20
HOUSING MATERIAL	PLASTIQUE 94V-2 (UL94)
HOUSING COLOUR	WHITE RAL 9003
HEIGHT/DEPTH (MM) :	41mm
LENGTH (MM) :	170mm
WIDTH (MM) :	35mm
MOUNTING WIDTH	170mm
NUMBER OF PRODUCTS PER BOX	16
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B209035100
RECUPEL CODE	-
BATTERY WEIGHT (G) :	0
EAN	8021046120073
COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62384 RoHS2 2011/65/UE
MODE	Wireless/Spy system wireless
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II

Accessories

LED-INVERTER
L88031HI-WIR

L99150 - COMMANDER

