
LEDY
L19203-B


IP42 IK08 12 pcs

LEDY 2,4W 300lm 1h M/NM SPY SYSTEM WHITE


The LEDY luminaire offers a wide range of colors and different finishes to suit any type of interior, from modern to traditional.

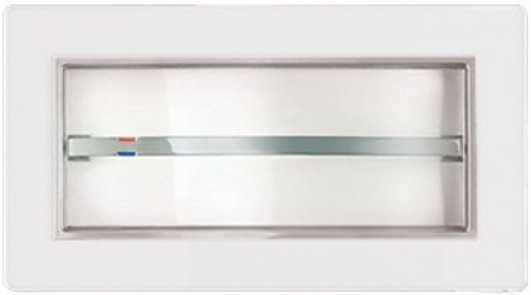

CODE	L19203-B
POWER (W)	2,4W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	300lm
PERMANENT (LM)	300lm
BATTERY	LI-FEPO4

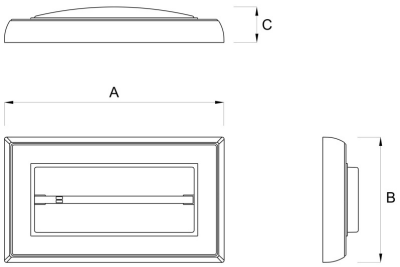

A=303mm B=173mm C=49mm

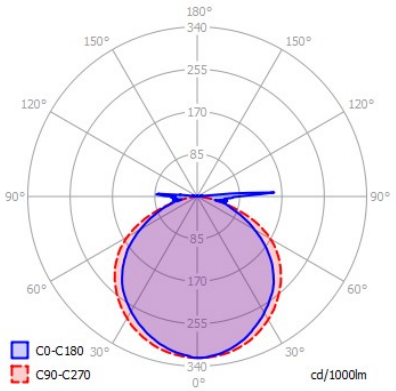

Features

PRODUCT NAME	LEDY
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	2,4W

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	300lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	300lm
SURVEILLANCE SYSTEM INSTALLATION	SURVEILLANCE CENTRALISEE
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	49mm
LENGTH (MM) :	303mm
WIDTH (MM) :	173mm
MOUNTING WIDTH	303mm
PRODUCT WEIGHT (G) :	1500GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
INCLUDED PICTOGRAMS	OUI
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020446
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
EAN	8021046113044
INTRASTAT CODE	85365000

COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Bus/spy system Security
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories


L99907 - LEDY SIGNALING KIT 

L99012 - LEDY SET FOR RECESSED 

L99013 - LEDY RECESSED BLOCHET 

L99045 - FIXATION 45° 

L99150 - COMMANDER 

L99007 - FLAG FIXATION 

L91070 - PICTO ADHESIVE 218mm X 85mm LEFT 

L91071 - PICTO ADHESIVE 218mm X 85mm RIGHT 

L91072 - PICTO ADHESIVE 218mm X 85mm DOWN 

L91073 - PICTO ADHESIVE 218mm X 85mm EXIT 

L91076 - PICTO ADHESIVE 218mm X 85mm FIRE EXTINGUISHER 

L91077 - PICTO ADHESIVE 218mm X 85mm HOSE REEL 