
LEXIT
LX1502-DALI

IP65 IK06 3 pcs


LEXIT 1,7W 32m 3h P DALI



CODE	LX1502-DALI
POWER (W)	1,7W
AUTONOMY (U)	3h
TYPE	Permanent
RESCUE (LM)	
PERMANENT (LM)	
BATTERY	NI-CD

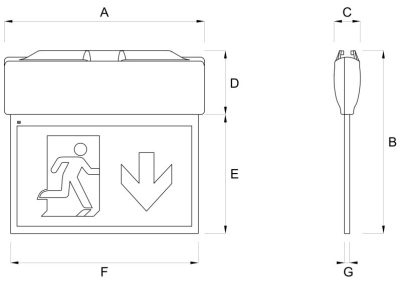

A=309mm B=283mm C=41mm
D=99mm E=185mm F=290mm G=8mm



Features

PRODUCT NAME	LEXIT
PRODUCT FUNCTION	LUMINAIRES DE SIGNALISATION LED HERMÉTIQUES
SYSTEM POWER (W) :	1,7W
SIGHT DISTANCE (M) :	32M
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY RECHARGE TIME (H) :	12H

LEXIT
LX1502-DALI

LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK06
HEIGHT/DEPTH (MM) :	41mm
LENGTH (MM) :	309mm
WIDTH (MM) :	289mm
MOUNTING WIDTH	309mm
PRODUCT WEIGHT (G) :	1300GR
NUMBER OF PRODUCTS PER BOX	3
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	NI-CD
INCLUDED PICTOGRAMS	OUI
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B207035090
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
EAN	8021046120189
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 RoHS2 2011/65/UE
FUNCTION	Evacuation lighting
INSTALLATION METHOD	Chain Flag mounting Hanging Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)

MODE	Dali Security
NOMINAL OPERATING TIME	3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Permanent

Accessories

L91041-LX - PICTO LEXIT DOWN 32M 

L92016 - LYRA WALL FLAG MOUNTING 

L92017 - LYRA/LEXIT CEILING FIXATION 

L92019-B-LX - LEXIT WHITE RECESSED KIT 

L92019-G-LX - LEXIT GREY RECESSED KIT 

L92020-LX - LEXIT SUSPENSION KIT 

L99025 - LEXIT/ASTRA PROTECTION GRID 

L99150 - COMMANDER 

LA032 - LEXIT WALL FIXATION / BOX 503 