LINERGY
EMERGENCY LIGHTING


LEXIT
LX1503

CE IP65 IK06 3 pcs


LEXIT 3W 32m WHITE P SPY SYSTEM



CODE	LX1503
POWER (W)	3W
AUTONOMY (U)	1h
	3h
TYPE	Permanent
RESCUE (LM)	
PERMANENT (LM)	
BATTERY	

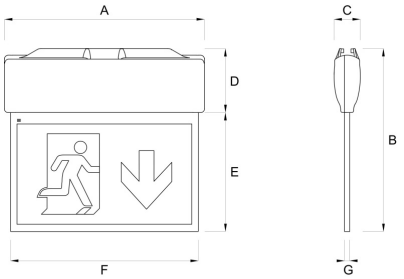

A=309mm B=283mm C=41mm
D=99mm E=185mm F=290mm G=8mm



Features

PRODUCT NAME	LEXIT
PRODUCT FUNCTION	LUMINAIRES DE SIGNALISATION LED HERMÉTIQUES
SYSTEM POWER (W) :	3W
SIGHT DISTANCE (M) :	32M
SURVEILLANCE SYSTEM INSTALLATION	SURVEILLANCE CENTRALISEE
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY RECHARGE TIME (H) :	12H

LEXIT
LX1503

LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK06
HEIGHT/DEPTH (MM) :	41mm
LENGTH (MM) :	309mm
WIDTH (MM) :	289mm
MOUNTING WIDTH	309mm
PRODUCT WEIGHT (G) :	1300GR
NUMBER OF PRODUCTS PER BOX	3
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
INCLUDED PICTOGRAMS	OUI
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
RECUPEL CODE	5.56
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 RoHS2 2011/65/UE
FUNCTION	Evacuation lighting
INSTALLATION METHOD	Chain Flag mounting Hanging Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
MODE	Security Spy center
NOMINAL OPERATING TIME	1h 3h

PROTECTION CLASS	II
TYPE OF SWITCHING	Permanent

Accessories

L91041-LX - PICTO LEXIT DOWN 32M 

L92020-LX - LEXIT SUSPENSION KIT 

L92016 - LYRA WALL FLAG MOUNTING 

L92017 - LYRA/LEXIT CEILING FIXATION 

L92019-B-LX - LEXIT WHITE RECESSED KIT 

L92019-G-LX - LEXIT GREY RECESSED KIT 

LA032 - LEXIT WALL FIXATION / BOX 503 

L99150 - COMMANDER 

L99025 - LEXIT/ASTRA PROTECTION GRID 