LINEA-LED
LLN1501


IP40 IK08 16 pcs

LINEA LED 8,4W 785lm 1h M/NM SPY SYSTEM


The LINEA LED wall unit offers excellent light performance, with up to 800 lumens, thanks to its 40 LED light sources. Its slim and elegant aluminum body gives it a sleek and refined style.



CODE	LLN1501
POWER (W)	8,4W
AUTONOMY (U)	1h
TYPE	
RESCUE (LM)	785lm
PERMANENT (LM)	785lm
BATTERY	LI-FEPO4

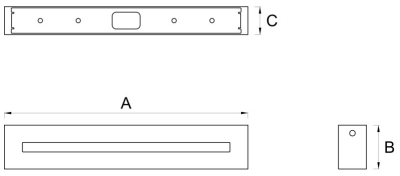

A=300mm B=55mm C=35mm

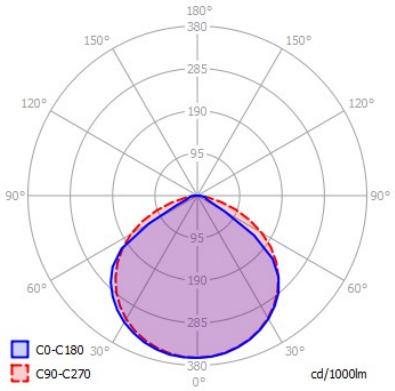

Features

PRODUCT NAME	LINEA-LED
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	8,4W

LINEA-LED
LLN1501

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	785lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	785lm
SURVEILLANCE SYSTEM INSTALLATION	SURVEILLANCE CENTRALISEE
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP40
HOUSING MATERIAL	ALUMINIUM
HOUSING COLOUR	ALUMINIUM RAL 9007
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	55mm
LENGTH (MM) :	300mm
WIDTH (MM) :	35mm
MOUNTING WIDTH	300mm
NUMBER OF PRODUCTS PER BOX	16
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B210035100
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	84 gr.
EAN	8021046122602

COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounting (wall)
MODE	Bus/spy system
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II

Accessories

L99150 - COMMANDER



LA305 - INHIBITION KIT FOR PERMANENT VERSION

