LINEA-LED
LLN1602


IP40 IK08 16 pcs

LINEA LED 8,4W 785lm 3h NM DALI


The LINEA LED wall unit offers excellent light performance, with up to 800 lumens, thanks to its 40 LED light sources. Its slim and elegant aluminum body gives it a sleek and refined style.



CODE	LLN1602
POWER (W)	8,4W
AUTONOMY (U)	3h
TYPE	
RESCUE (LM)	785lm
PERMANENT (LM)	
BATTERY	LI-FEPO4

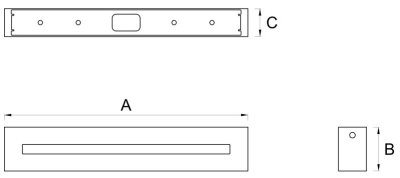

A=300mm B=55mm C=35mm

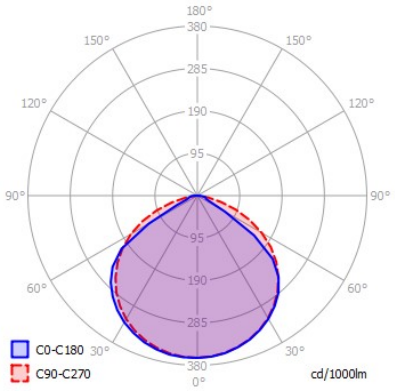

Features

PRODUCT NAME	LINEA-LED
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	8,4W

LINEA-LED
LLN1602

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	785lm
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP40
HOUSING MATERIAL	ALUMINIUM
HOUSING COLOUR	ALUMINIUM RAL 9007
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	55mm
LENGTH (MM) :	300mm
WIDTH (MM) :	35mm
MOUNTING WIDTH	300mm
NUMBER OF PRODUCTS PER BOX	16
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B210035100
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	84 gr.
EAN	8021046122633

COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 EN 62386-101 EN 62386-102 EN 62386-202 EN 62386-207 RoHS2 2011/65/UE
FUNCTION	Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounting (wall)
MODE	Dali
NOMINAL OPERATING TIME	3h
PROTECTION CLASS	II

Accessories

L99150 - COMMANDER



LA305 - INHIBITION KIT FOR PERMANENT VERSION

