
# LYRA-EVO
L70024

IP40 IK08 3 pcs


## LYRA EVO 2,4W 32m 3h M/NM SPY SYSTEM



| | |
|---|---|
| **CODE** | L70024 |
| **POWER (W)** | 2,4W |
| **AUTONOMY (U)** | 3h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | |
| **PERMANENT (LM)** | |
| **BATTERY** | |

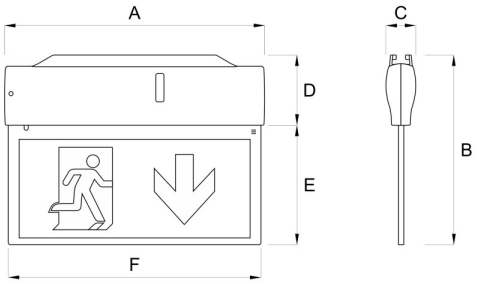


A = 289 mm B = 261 mm C = 34 mm D = 77 mm E = 185 mm F = 280 mm




## Features

| | |
|---|---|
| PRODUCT NAME | LYRA-EVO |
| PRODUCT FUNCTION | LUMINAIRES DE SIGNALISATION LED NON HERMETIQUES |
| SYSTEM POWER (W) : | 2,4W |
| SIGHT DISTANCE (M) : | 32M |
| SURVEILLANCE SYSTEM INSTALLATION | SURVEILLANCE CENTRALISEE |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY RECHARGE TIME (H) : | 12H |

# LYRA-EVO
## L70024

| | |
|---|---|
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP40 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | WHITE RAL 9003 |
| MATERIAL OF THE COVER | TRANSPARENTE PLASTIC |
| IMPACT RESISTANCE | IK08 |
| HEIGHT/DEPTH (MM) : | 34mm |
| LENGTH (MM) : | 289mm |
| WIDTH (MM) : | 261mm |
| MOUNTING WIDTH | 289mm |
| PRODUCT WEIGHT (G) : | 1200GR |
| NUMBER OF PRODUCTS PER BOX | 3 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| INCLUDED PICTOGRAMS | OUI |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020446 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 41 |
| EAN | 8021046113563 |
| EAN PACK | 8021046342543 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>RoHS2 2011/65/UE |
| FUNCTION | Evacuation lighting |

| | |
|---|---|
| INSTALLATION METHOD | Chain<br>Flag mounting<br>Hanging<br>Surface mounted recessed<br>Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| MODE | Bus/spy system<br>Security |
| NOMINAL OPERATING TIME | 3h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**L92016** - LYRA WALL FLAG MOUNTING



**L92017** - LYRA/LEXIT CEILING FIXATION



**L92018** - LYRA WALL FIXATION



**L92019-B-LY** - LYRA & ORION WHITE RECESSED KIT



**L92019-G-LY** - LYRA & ORION GREY RECESSED KIT



**L92020** - LYRA SUSPENSION KIT



**L99030** - LYRA - ASTRA PROTECTION GRID



**L99150** - COMMANDER



**LA163** - ORION/LYRA KIT OF PICTOS



**LA283** - ORION/LYRA PICTO DOUBLE SIDE

