MINI-ROUND
LMR1001


IP40 IK08

MINI ROUND 1W 3h 50lm M/NM

The MINI ROUND is ideal for stairway lighting, thanks to its integrated diffuser. It is well-suited for small residential spaces or public areas such as theaters. Its magnetic decorative ring is available in multiple colors.



CODE	LMR1001
POWER (W)	1W
AUTONOMY (U)	1h
TYPE	
RESCUE (LM)	50lm
PERMANENT (LM)	50lm
BATTERY	LI-FEPO4

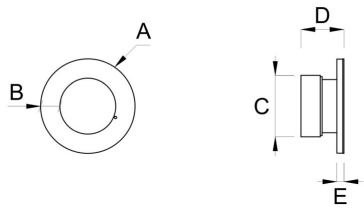

A=80mm B=17mm C=52mm
D=37mm E=6mm

Features

PRODUCT NAME	MINI-ROUND
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES

MINI-ROUND
LMR1001

SYSTEM POWER (W) :	1W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	50lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	50lm
SURVEILLANCE SYSTEM INSTALLATION	SANS
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V - 0,55Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP40
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
EXTERNAL DIAMETER (MM) :	80mm
FLUSH-MOUNTED DIAMETER (MM) :	52mm
NUMBER OF PRODUCTS PER BOX	24
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B207035230
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	21 gr.
EAN	8021046119534
EAN PACK	8021046338003

COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient lighting (anti-panic)
INSTALLATION METHOD	Built-in Floor mounting
MODE	Standard
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II

Accessories

LA326 - MINI ROUND COLOR OPTION

