MINI-ROUND
LMR1901


IP40 IK08 12 pcs

MINI ROUND CENTRAL BATTERY 1W BC

The MINI ROUND is ideal for stairway lighting, thanks to its integrated diffuser. It is well-suited for small residential spaces or public areas such as theaters. Its magnetic decorative ring is available in multiple colors.



CODE	LMR1901
POWER (W)	1W
AUTONOMY (U)	1h
TYPE	
RESCUE (LM)	
PERMANENT (LM)	
BATTERY	LI-FEPO4

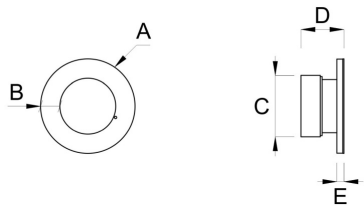

A=80mm B=17mm C=52mm
D=37mm E=6mm

Features

PRODUCT NAME	MINI-ROUND
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES

MINI-ROUND
LMR1901

SYSTEM POWER (W) :	1W
SURVEILLANCE SYSTEM INSTALLATION	SANS
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP40
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
EXTERNAL DIAMETER (MM) :	80mm
FLUSH-MOUNTED DIAMETER (MM) :	52mm
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	-
RECUPEL CODE	-
BATTERY WEIGHT (G) :	0
EAN	8021046122749
COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
INSTALLATION METHOD	Built-in
MODE	Centralized battery

NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II

Accessories

LA326 - MINI ROUND COLOR OPTION

