
MOON-ROUND
L3652-DET


IP54 IK08 10 pcs


MOON 18W 3000/4000K 1700/1950lm IP54 + SENSOR



CODE	L3652-DET
POWER (W)	18W
AUTONOMY (U)	
TYPE	
RESCUE (LM)	
PERMANENT (LM)	1700/1950lm
BATTERY	

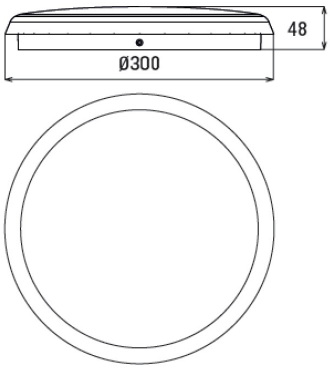

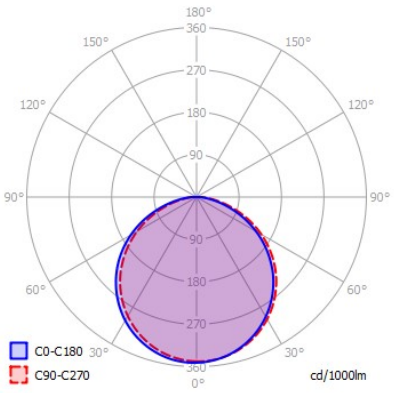

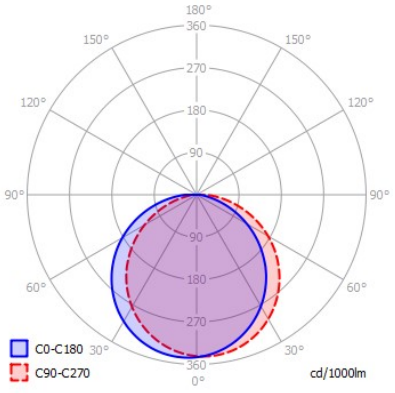

Features

PRODUCT NAME	MOON-ROUND
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	18W
CONTINUOUS MODE LUMINOUS FLOW (LM) :	1700/1950lm
WITH CONNECTION TO A IMPULSE RELAY	YES

LINERGY EMERGENCY LIGHTING

MOON-ROUND
L3652-DET

POWER SUPPLY (V) :	220-230V
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP54
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	PLASTIQUE OPAQUE
IMPACT RESISTANCE	IK08
EXTERNAL DIAMETER (MM) :	300mm
MOUNTING WIDTH	300mm
PRODUCT WEIGHT (G) :	1100GR
NUMBER OF PRODUCTS PER BOX	10
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
VOLTAGE TYPE	AC
MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE)	33
MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE)	55
NONIMAL LIFETIME L70/B50 (H) :	100.000H (L80B10)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
COLOUR TEMPERATURE	3000K - 4000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	-
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	0
EAN	9900000000981
INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22
FUNCTION	Lighting with detection Twilight
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector

MODE	Light ON/OFF
PROTECTION CLASS	II

Accessories

L3652-SETTING - MOON REMOTE CONTROL



LMOON-RING-N - RING MOON BLACK

