
MOON-ROUND
L3652-SE


IP54 IK08 10 pcs


MOON 18W 3000/4000K 1700/1950lm - 355lm IP54 3h + EMERGENCY AUT



CODE	L3652-SE
POWER (W)	18W
AUTONOMY (U)	3h
TYPE	Not permanent-Permanent
RESCUE (LM)	355lm
PERMANENT (LM)	1700/1950lm
BATTERY	LI-FEPO4

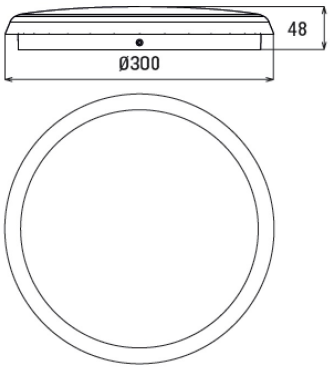

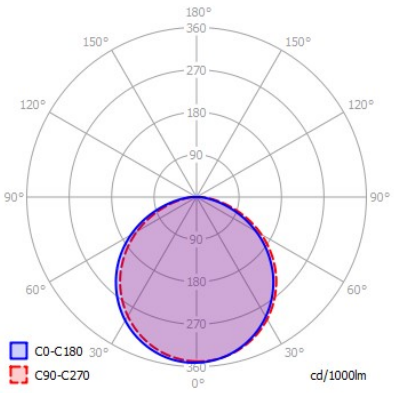

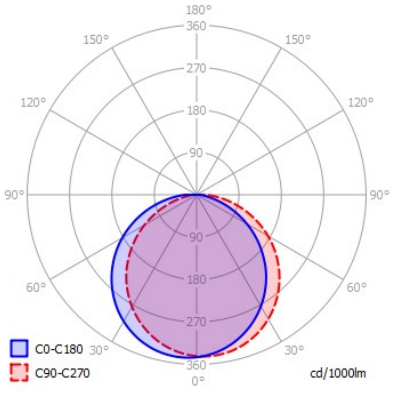

Features

PRODUCT NAME	MOON-ROUND
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	18W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	355lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	1700/1950lm

MOON-ROUND
L3652-SE

WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FePO4 6,4V - 1,5Ah
BATTERY RECHARGE TIME (H) :	24H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP54
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
EXTERNAL DIAMETER (MM) :	300mm
MOUNTING WIDTH	300mm
PRODUCT WEIGHT (G) :	1100GR
NUMBER OF PRODUCTS PER BOX	10
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE)	34
MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE)	56
NONIMAL LIFETIME L70/B50 (H) :	100.000H (L80B10)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
COLOUR TEMPERATURE	3000K - 4000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020590
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	83 gr.
EAN	9900000000998
INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 62034

MOON-ROUND
L3652-SE

FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Autotest Light ON/OFF Security
NOMINAL OPERATING TIME	3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L3652-SETTING - MOON REMOTE CONTROL



LMOON-RING-N - RING MOON BLACK

