
MOON-SQUARE
L3654-SE


IP54 IK08


MOON SQUARE LED 18W 3000/4000K 1900/2100lm - 355lm IP54 3h + EMERGENCY AUT



CODE	L3654-SE
POWER (W)	18W
AUTONOMY (U)	3h
TYPE	Not permanent-Permanent
RESCUE (LM)	355lm
PERMANENT (LM)	1900/2100lm
BATTERY	LI-FEPO4

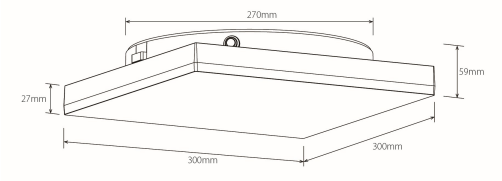

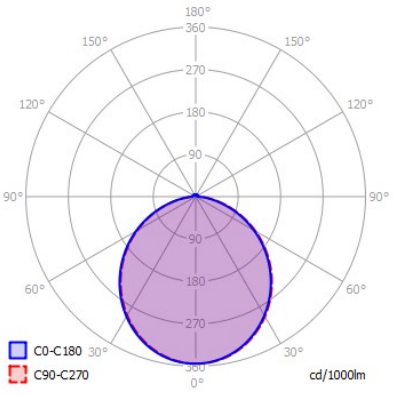

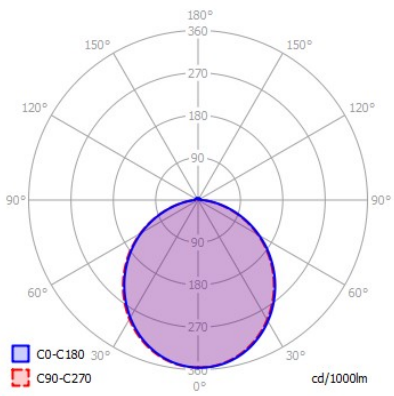

Features

PRODUCT NAME	MOON-SQUARE
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	18W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	355lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	1900/2100lm

MOON-SQUARE
L3654-SE

WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FePO4 6,4V - 1,5Ah
BATTERY RECHARGE TIME (H) :	24H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP54
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	PLASTIQUE OPAQUE
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	63mm
LENGTH (MM) :	300mm
WIDTH (MM) :	300mm
PRODUCT WEIGHT (G) :	1100GR
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE)	33
MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE)	55
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
COLOUR TEMPERATURE	3000K - 4000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020590
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	83 gr.
EAN	9900000004583
INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 62034

MOON-SQUARE
L3654-SE

FUNCTION	Ambient and evacuation lighting
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Autotest Light ON/OFF Security
NOMINAL OPERATING TIME	3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L3652-SETTING - MOON REMOTE CONTROL

