LINERGY
EMERGENCY LIGHTING


ORION
L5142-G-WIR

IP40 IK07 4 pcs


ORION 2,4W 32m 1h GREY SPY SYSTEM WIRELESS



CODE	L5142-G-WIR
POWER (W)	2,4W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	
PERMANENT (LM)	
BATTERY	LI-FEPO4

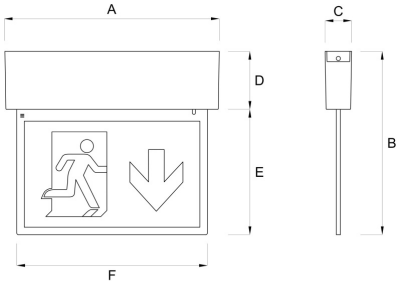

A=315mm B=269mm C=39mm
D=85mm E=184mm F=280mm



Features


PRODUCT NAME	ORION
PRODUCT FUNCTION	LUMINAIRES DE SIGNALISATION LED NON HERMETIQUES
SYSTEM POWER (W) :	2,4W
SIGHT DISTANCE (M) :	32M
SURVEILLANCE SYSTEM INSTALLATION	WIRELESS
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V - 1,5Ah

BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP40
HOUSING MATERIAL	FONTE D'ALUMINIUM
HOUSING COLOUR	GRIS RAL 7035
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	47mm
LENGTH (MM) :	305mm
WIDTH (MM) :	268mm
MOUNTING WIDTH	315mm
PRODUCT WEIGHT (G) :	1500GR
NUMBER OF PRODUCTS PER BOX	4
INCANDESCENT WIRE 850°C	OUI
BATTERY STATUS	LI-FEPO4
INCLUDED PICTOGRAMS	OUI
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020446
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 RoHS2 2011/65/UE
FUNCTION	Evacuation lighting
INSTALLATION METHOD	Chain Flag mounting Hanging Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)

LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Security Wireless/Spy system wireless
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L92030-B - ORION WALL FIXATION WHITE



L92030-G - ORION WALL FIXATION GREY



L92032 - ORION SUSPENSION KIT



L99150 - COMMANDER



LA163 - ORION/LYRA KIT OF PICTOS



LA283 - ORION/LYRA PICTO DOUBLE SIDE

