LINERGY
EMERGENCY LIGHTING


# ORION
# L5141-G

CE IP40 IK07 4 pcs


## ORION 2,4W 32m 3h M/NM GREY



| | |
|---|---|
| **CODE** | L5141-G |
| **POWER (W)** | 2,4W |
| **AUTONOMY (U)** | 3h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | |
| **PERMANENT (LM)** | |
| **BATTERY** | LI-FEPO4 |

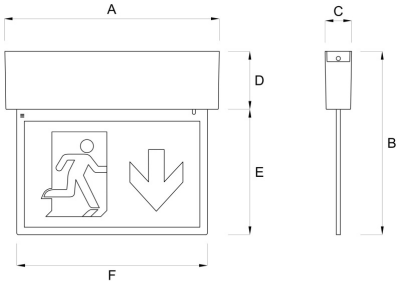


A=315mm B=269mm C=39mm
D=85mm E=184mm F=280mm




## Features

| | |
|---|---|
| PRODUCT NAME | ORION |
| PRODUCT FUNCTION | LUMINAIRES DE SIGNALISATION LED NON HERMETIQUES |
| SYSTEM POWER (W) : | 2,4W |
| SIGHT DISTANCE (M) : | 32M |
| SURVEILLANCE SYSTEM INSTALLATION | SANS |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | Li-FeP04 3,2V - 1,5Ah |

| | |
|---|---|
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP40 |
| HOUSING MATERIAL | FONTE D'ALUMINIUM |
| HOUSING COLOUR | GRIS RAL 7035 |
| MATERIAL OF THE COVER | TRANSPARENTE PLASTIC |
| IMPACT RESISTANCE | IK07 |
| HEIGHT/DEPTH (MM) : | 47mm |
| LENGTH (MM) : | 305mm |
| WIDTH (MM) : | 268mm |
| MOUNTING WIDTH | 315mm |
| PRODUCT WEIGHT (G) : | 1500GR |
| NUMBER OF PRODUCTS PER BOX | 4 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| INCLUDED PICTOGRAMS | OUI |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| ENEC | YES |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020446 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 41 |
| EAN | 8021046118506 |
| EAN PACK | 8021046330311 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>RoHS2 2011/65/UE |
| FUNCTION | Evacuation lighting |

| | |
|---|---|
| INSTALLATION METHOD | Chain<br>Flag mounting<br>Hanging<br>Surface mounted recessed<br>Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Security<br>Standard |
| NOMINAL OPERATING TIME | 3h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**L92030-B** - ORION WALL FIXATION WHITE



**L92030-G** - ORION WALL FIXATION GREY



**L92032** - ORION SUSPENSION KIT



**L99150** - COMMANDER



**LA163** - ORION/LYRA KIT OF PICTOS



**LA283** - ORION/LYRA PICTO DOUBLE SIDE

