

IP65 IK10

POLARIS LED WALL 5W 570lm - 365lm 1h - 122lm 3h IP65 M/NM WHITE



CODE	L9008-B
POWER (W)	5W
AUTONOMY (U)	1h
	3h
TYPE	Not permanent-
	Permanent
RESCUE (LM)	365lm (1h) - 122lm (3h)
PERMANENT (LM)	570lm - 114lm
BATTERY	NI-MH

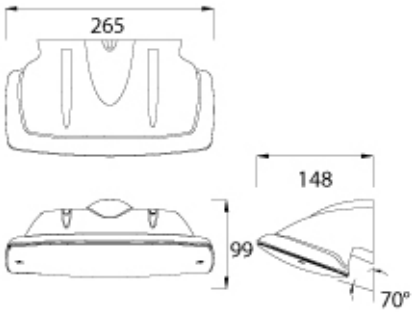

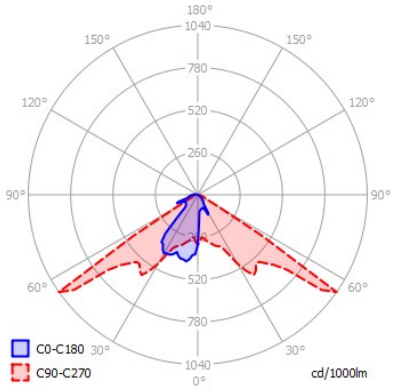

Features

PRODUCT NAME	POLARIS
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	5W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	365lm (1h) - 122lm (3h)
CONTINUOUS MODE LUMINOUS FLOW (LM) :	570lm - 114lm

WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Ni-MH 3,6V - 2,2Ah
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	BLANC RAL 9002
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK10
HEIGHT/DEPTH (MM) :	99mm
LENGTH (MM) :	265mm
WIDTH (MM) :	148mm
MOUNTING WIDTH	265mm
PRODUCT WEIGHT (G) :	700GR
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	NI-MH
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	100.000H (L70/B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-25°C / + 55°C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B207035000
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	162 gr.
EAN	9900000002121
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
MODE	Autotest Security

NOMINAL OPERATING TIME	1h
	3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent
	Permanent

Accessories

L91067 - PICTO POLARIS LEFT



L91066 - PICTO POLARIS RIGHT



L91065 - PICTO POLARIS DOWN



L91069 - PICTO POLARIS TOP



L91063 - PICTO POLARIS LEFT



L91062 - PICTO POLARIS RIGHT



L91061 - PICTO POLARIS DOWN



L91068 - PICTO POLARIS TOP



L112007 - POLARIS PROTECTION GRID



L112005 - POLARIS WALL PLATE



L112006 - POLARIS RECESSED KIT

