
PRODIGY-WALL
L27228W-N-3-DALI


IP40 IK07 12 pcs

PRODIGY WALL 2,1W 270lm 3h M/NM DALI BLACK


The Prodigy Wall model, with its modern and minimalist design, delivers excellent performance with downward-oriented light output. The color of the Prodigy Wall can be customized as an option.

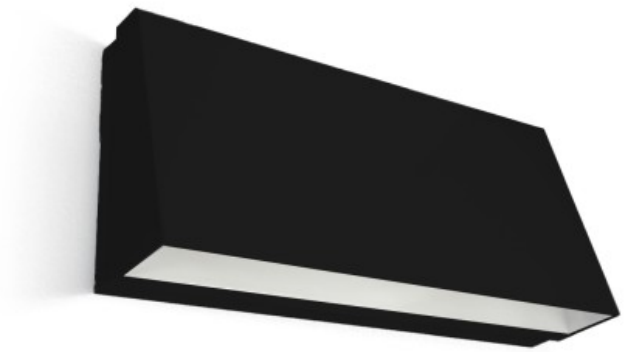

CODE	L27228W-N-3-DALI
POWER (W)	2,1W
AUTONOMY (U)	3h
TYPE	Not permanent-Permanent
RESCUE (LM)	270lm
PERMANENT (LM)	200lm
BATTERY	LI-FEPO4

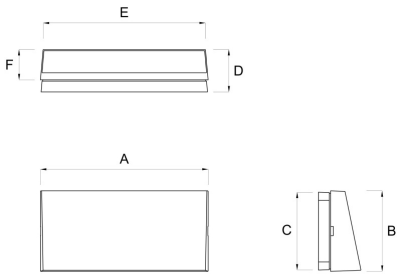

A=245mm B=118mm C=114m
D=62m E=238mm F=44mm

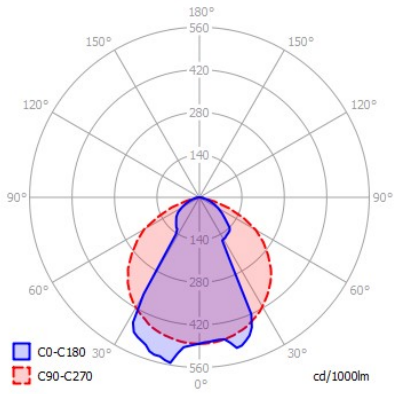

Features

PRODUCT NAME	PRODIGY-WALL
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	2,1W

PRODIGY-WALL
L27228W-N-3-DALI

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	270lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	200lm
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP40
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	NOIR RAL 9005
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	62mm
LENGTH (MM) :	245mm
WIDTH (MM) :	114mm
MOUNTING WIDTH	245mm
PRODUCT WEIGHT (G) :	1000GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020590
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	81 gr.
EAN	8021046125832
EAN PACK	8021046359602
INTRASTAT CODE	85365000

PRODIGY-WALL
L27228W-N-3-DALI

COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 EN 62386-101 EN 62386-102 EN 62386-202 EN 62386-207 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting
INSTALLATION METHOD	Surface mounting (wall)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Dali Security
NOMINAL OPERATING TIME	3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories


LA321 - PRODIGY WALL SIGNALLING PLEXI



L27-RAL-W - PRODIGY WALL RAL COLOUR



L99190 - RECESSED KIT



L99041 - PRODIGY FLUSH-MOUNTING BOX



L99021 - PROTECTION GRID



L99150 - COMMANDER



L99157 - INHIBITION KIT FOR PERMANENT VERSION

