# PRODIGY-XL
## L2002-B-65


IP42 IP65 IK07 12 pcs

**PRODIGY XL 5,5W 560lm IP65 WHITE SPY CENTER**


The Prodigy XL offers optimal light output and extended battery life. The color of the Prodigy XL can be customized as an option.



| | |
|---|---|
| **CODE** | L2002-B-65 |
| **POWER (W)** | 5,5W |
| **AUTONOMY (U)** | 1h |
| | 3h |
| **TYPE** | Not permanent- |
| | Permanent |
| **RESCUE (LM)** | 560lm |
| **PERMANENT (LM)** | 560lm |
| **BATTERY** | |

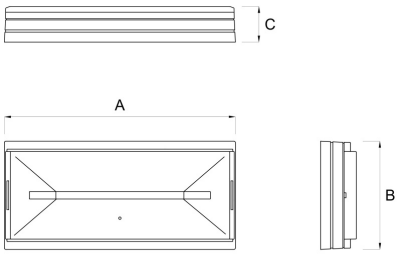


A=305mm B=143mm C=47mm

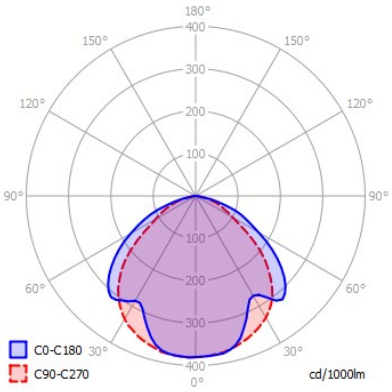


## Features

| | |
|---|---|
| PRODUCT NAME | PRODIGY-XL |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES |
| SYSTEM POWER (W) : | 5,5W |

# PRODIGY-XL
## L2002-B-65

| | |
|---|---|
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 560lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 560lm |
| SURVEILLANCE SYSTEM INSTALLATION | SURVEILLANCE CENTRALISEE |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| WITH REMOTE CONTROL (COMMANDER) | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP65 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | WHITE RAL 9003 |
| MATERIAL OF THE COVER | TRANSPARENTE PLASTIC |
| IMPACT RESISTANCE | IK07 |
| HEIGHT/DEPTH (MM) : | 47mm |
| LENGTH (MM) : | 305mm |
| WIDTH (MM) : | 143mm |
| MOUNTING WIDTH | 305mm |
| PRODUCT WEIGHT (G) : | 1100GR |
| NUMBER OF PRODUCTS PER BOX | 12 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| ENEC | YES |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020921 |
| RECUPEL CODE | 5.56 |
| EAN | 8021046118469 |
| EAN PACK | 8021046330243 |
| INTRASTAT CODE | 85365000 |

| | |
|---|---|
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>EN 61347-1<br>EN 61347-2-13<br>EN 61347-2-7<br>EN 62031<br>EN 62034<br>EN 62384<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic) |
| INSTALLATION METHOD | Flag mounting<br>Surface mounted recessed<br>Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Centralized battery<br>Spy center |
| NOMINAL OPERATING TIME | 1h<br>3h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**L27-RAL-XL** - PRODIGY XL RAL COLOR OPTION



**L91070-XL** - PICTO ADHESIVE 285mm X 110mm LEFT



**L91071-XL** - PICTO ADHESIVE 285mm X 100mm RIGHT



**L91072- XL** - PICTO ADHESIVE 285mm X 110mm DOWN



**L91073- XL** - PICTO ADHESIF 285mm X 110mm SORTIE DE SECOURS



**L99041-XL** - PRODIGY XL FLUSH-MOUNTING BOX



**L99000** - STEP PROTECTION GRID



**L99045** - FIXATION 45°




**L99150** - COMMANDER



**L99004** - STEP & CRISTAL & PRODIGY XL SET FOR RECESSED



**L99007** - FLAG FIXATION



**L99040-XL** - PRODIGY XL SUSPENDED PLEXI KIT

