PRODIGY-XL
L27300-B-3-WIR


IP42 IK07 12 pcs

PRODIGY XL 0,2W 3h 190lm WIRELESS WHITE


The Prodigy XL offers optimal light output and extended battery life. The color of the Prodigy XL can be customized as an option.



CODE	L27300-B-3-WIR
POWER (W)	0,2W
AUTONOMY (U)	3h
TYPE	Not permanent
RESCUE (LM)	190lm
PERMANENT (LM)	
BATTERY	LI-FEPO4

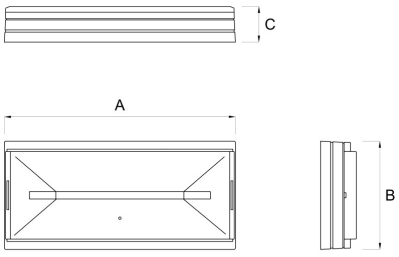

A=305mm B=143mm C=47mm

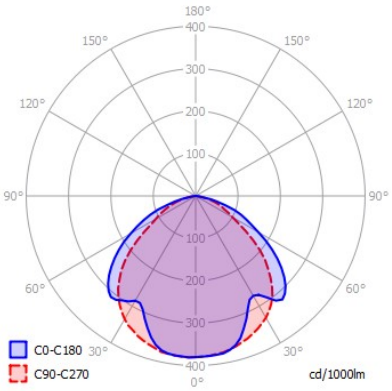

Features

PRODUCT NAME	PRODIGY-XL
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	0,2W

PRODIGY-XL
L27300-B-3-WIR

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	190lm
SURVEILLANCE SYSTEM INSTALLATION	WIRELESS
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	47mm
LENGTH (MM) :	305mm
WIDTH (MM) :	143mm
MOUNTING WIDTH	305mm
PRODUCT WEIGHT (G) :	1100GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020921
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	63 gr.
EAN	8021046123036

PRODIGY-XL
L27300-B-3-WIR

COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Flag mounting Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Security Wireless/Spy system wireless
NOMINAL OPERATING TIME	3h
PICTOGRAM VISIBILITY	Double-sided Four-sided Only on one side Three-sided Uni / bilateral
PROTECTION CLASS	II
TYPE OF PICTOGRAM	Acrylic glass plate Other
TYPE OF SWITCHING	Not permanent

Accessories

L99040-XL - PRODIGY XL SUSPENDED PLEXI KIT



L99004 - STEP & CRISTAL & PRODIGY XL SET FOR RECESSED



L99041-XL - PRODIGY XL FLUSH-MOUNTING BOX




L99000 - STEP PROTECTION GRID



L99045 - FIXATION 45°



L99007 - FLAG FIXATION



L91070-XL - PICTO ADHESIVE 285mm X 110mm LEFT



L91071-XL - PICTO ADHESIVE 285mm X 100mm RIGHT



PRODIGY-XL
L27300-B-3-WIR

L91073- XL - PICTO ADHESIF 285mm X 110mm SORTIE DE SECOURS



L91072- XL - PICTO ADHESIVE 285mm X 110mm DOWN



L27-RAL-XL - PRODIGY XL RAL COLOR OPTION



L99150 - COMMANDER

