PRODIGY-XL
L27329-B-3-DALI


IP42 IK07 12 pcs

PRODIGY XL 7,1W 3h 770lm M/NM DALI WHITE


The Prodigy XL offers optimal light output and extended battery life. The color of the Prodigy XL can be customized as an option.



CODE	L27329-B-3-DALI
POWER (W)	7,1W
AUTONOMY (U)	3h
TYPE	Not permanent-Permanent
RESCUE (LM)	770lm
PERMANENT (LM)	770lm
BATTERY	LI-FEPO4

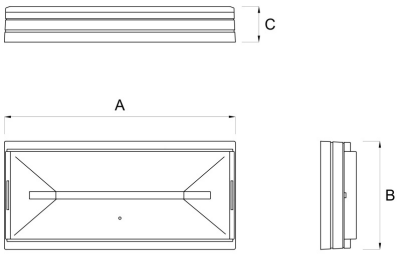

A=305mm B=143mm C=47mm

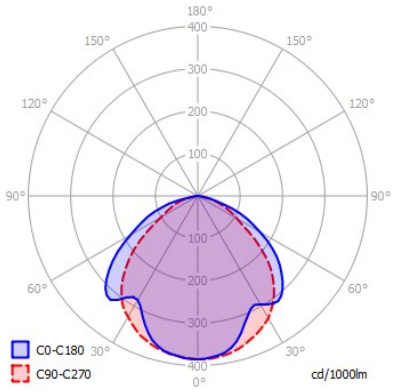

Features

PRODUCT NAME	PRODIGY-XL
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	7,1W

PRODIGY-XL
L27329-B-3-DALI

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	770lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	770lm
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	47mm
LENGTH (MM) :	305mm
WIDTH (MM) :	143mm
MOUNTING WIDTH	305mm
PRODUCT WEIGHT (G) :	1100GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020725
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	183 gr.
EAN	8021046120608

COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 EN 62386-101 EN 62386-102 EN 62386-202 EN 62386-207 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Flag mounting Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Dali Security
NOMINAL OPERATING TIME	3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99040-XL - PRODIGY XL SUSPENDED PLEXI KIT



L99004 - STEP & CRISTAL & PRODIGY XL SET FOR RECESSED



L99041-XL - PRODIGY XL FLUSH-MOUNTING BOX




L99000 - STEP PROTECTION GRID



L99045 - FIXATION 45°



L99007 - FLAG FIXATION



L91070-XL - PICTO ADHESIVE 285mm X 110mm LEFT



L91071-XL - PICTO ADHESIVE 285mm X 100mm RIGHT



L91072- XL - PICTO ADHESIVE 285mm X 110mm DOWN



L91073- XL - PICTO ADHESIF 285mm X 110mm SORTIE DE SECOURS



L27-RAL-XL - PRODIGY XL RAL COLOR OPTION



L99150 - COMMANDER

