PRODIGY
L27208-B-3


IP42 IK08 12 pcs

PRODIGY 2,1W 280lm 3h M/NM SPY SYSTEM WHITE


Design and compact, the Prodigy fits into any interior while offering excellent value for money. The color of the Prodigy can be customized as an option.



CODE	L27208-B-3
POWER (W)	2,1W
AUTONOMY (U)	3h
TYPE	Not permanent-Permanent
RESCUE (LM)	280lm
PERMANENT (LM)	200lm
BATTERY	LI-FEPO4

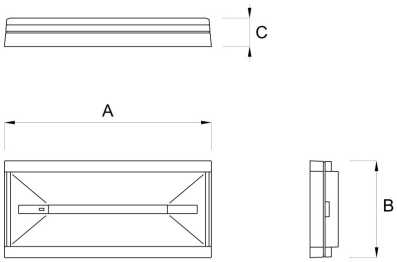

A=243mm B=114mm C=33mm

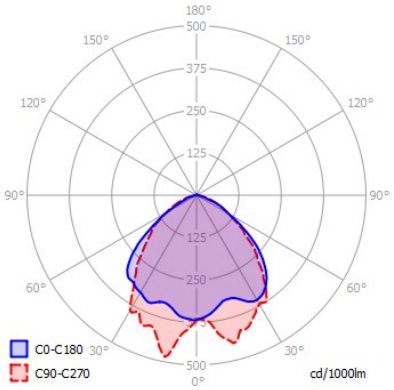

Features

PRODUCT NAME	PRODIGY
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	2,1W

PRODIGY
L27208-B-3

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	280lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	200lm
SURVEILLANCE SYSTEM INSTALLATION	SURVEILLANCE CENTRALISEE
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	33mm
LENGTH (MM) :	243mm
WIDTH (MM) :	114mm
MOUNTING WIDTH	243mm
PRODUCT WEIGHT (G) :	500GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020590
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	81 gr.
EAN	8021046119794
EAN PACK	8021046339147
INTRASTAT CODE	85365000

COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Flag mounting Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Bus/spy system Security
NOMINAL OPERATING TIME	3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99040 - PRODIGY SUSPENDED PLEXI KIT



L99190 - RECESSED KIT



L99041 - PRODIGY FLUSH-MOUNTING BOX



L99045 - FIXATION 45°



L91070 - PICTO ADHESIVE 218mm X 85mm LEFT



L91071 - PICTO ADHESIVE 218mm X 85mm RIGHT



L91072 - PICTO ADHESIVE 218mm X 85mm DOWN



L91073 - PICTO ADHESIVE 218mm X 85mm EXIT



L27-RAL - PRODIGY RAL COLOR OPTION



L91076 - PICTO ADHESIVE 218mm X 85mm FIRE EXTINGUISHER




L91077 - PICTO ADHESIVE 218mm X 85mm HOSE REEL



L99021 - PROTECTION GRID




L99007 - FLAG FIXATION



L99150 - COMMANDER



L99157 - INHIBITION KIT FOR PERMANENT VERSION



L99010 - CABLE ENTRY

