PRODIGY
L27207-B-CON


IP42 IK08 12 pcs

PRODIGY 2,4W 320lm 1h-1,5h-2h-3hh M/NM CONNECT WHITE


Design and compact, the Prodigy fits into any interior while offering excellent value for money. The color of the Prodigy can be customized as an option.



CODE	L27207-B-CON
POWER (W)	2,4W
AUTONOMY (U)	1h
	3h
TYPE	Not permanent-
	Permanent
RESCUE (LM)	320lm
PERMANENT (LM)	200lm
BATTERY	LI-FEPO4

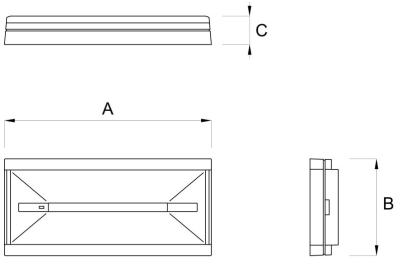

A=243mm B=114mm C=33mm

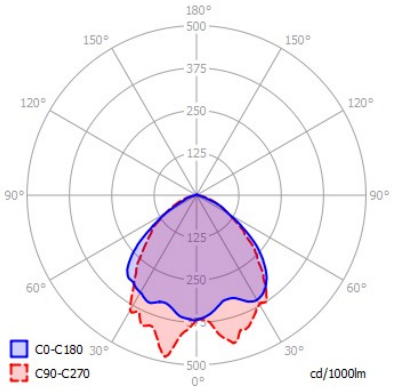

Features

PRODUCT NAME	PRODIGY
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	2,4W

PRODIGY
L27207-B-CON

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	320lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	200lm
SURVEILLANCE SYSTEM INSTALLATION	CONNECT
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V 3Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	33mm
LENGTH (MM) :	243mm
WIDTH (MM) :	114mm
MOUNTING WIDTH	243mm
PRODUCT WEIGHT (G) :	500GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020446
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
EAN	8021046115208
EAN PACK	8021046333527
INTRASTAT CODE	85365000


COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62034 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Flag mounting Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Security
NOMINAL OPERATING TIME	1h 3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99040 - PRODIGY SUSPENDED PLEXI KIT



L99190 - RECESSED KIT



L99041 - PRODIGY FLUSH-MOUNTING BOX



L99045 - FIXATION 45°



L91070 - PICTO ADHESIVE 218mm X 85mm LEFT



L91071 - PICTO ADHESIVE 218mm X 85mm RIGHT



L91072 - PICTO ADHESIVE 218mm X 85mm DOWN



L91073 - PICTO ADHESIVE 218mm X 85mm EXIT



L91076 - PICTO ADHESIVE 218mm X 85mm FIRE EXTINGUISHER



L91077 - PICTO ADHESIVE 218mm X 85mm HOSE REEL



PRODIGY
L27207-B-CON


L27-RAL - PRODIGY RAL COLOR OPTION



L99021 - PROTECTION GRID




L99007 - FLAG FIXATION



L99150 - COMMANDER



L99157 - INHIBITION KIT FOR PERMANENT VERSION



L99010 - CABLE ENTRY

