# PRODIGY
# L27208-B-DALI


IP42 IK08 12 pcs

**PRODIGY 0,3W 320lm 1h NM DALI WHITE**


Design and compact, the Prodigy fits into any interior while offering excellent value for money. The color of the Prodigy can be customized as an option.



| | |
|---|---|
| **CODE** | L27208-B-DALI |
| **POWER (W)** | 0,3 |
| **AUTONOMY (U)** | 1h |
| **TYPE** | Not permanent |
| **RESCUE (LM)** | 320lm |
| **PERMANENT (LM)** | |
| **BATTERY** | LI-FEPO4 |

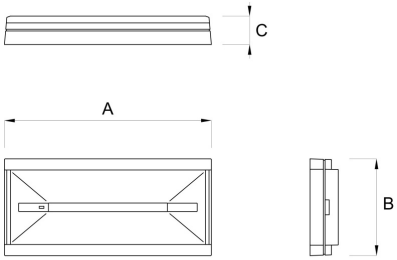


A=243mm B=114mm C=33mm

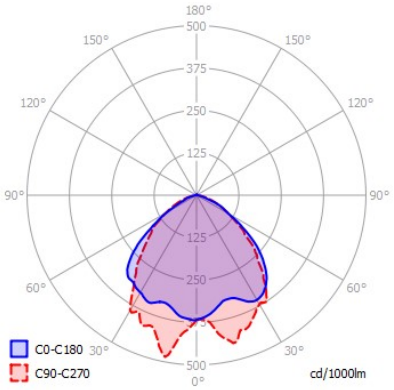


## Features

| | |
|---|---|
| PRODUCT NAME | PRODIGY |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES |
| SYSTEM POWER (W) : | 0,3 |

# PRODIGY
# L27208-B-DALI

| | |
|---|---|
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 320lm |
| SURVEILLANCE SYSTEM INSTALLATION | DALI |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| WITH REMOTE CONTROL (COMMANDER) | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | Li-FeP04 3,2V - 1,5Ah |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP42 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | WHITE RAL 9003 |
| MATERIAL OF THE COVER | TRANSPARENTE PLASTIC |
| IMPACT RESISTANCE | IK08 |
| HEIGHT/DEPTH (MM) : | 33mm |
| LENGTH (MM) : | 243mm |
| WIDTH (MM) : | 114mm |
| MOUNTING WIDTH | 243mm |
| PRODUCT WEIGHT (G) : | 500GR |
| NUMBER OF PRODUCTS PER BOX | 12 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| ENEC | YES |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020446 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 41 |
| EAN | 8021046117738 |
| EAN PACK | 8021046328752 |
| INTRASTAT CODE | 85365000 |


| | |
|---|---|
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>EN 61347-1<br>EN 61347-2-13<br>EN 61347-2-7<br>EN 62031<br>EN 62384<br>EN 62386-101<br>EN 62386-102<br>EN 62386-202<br>EN 62386-207<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic) |
| INSTALLATION METHOD | Flag mounting<br>Surface mounted recessed<br>Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Dali<br>Security |
| NOMINAL OPERATING TIME | 1h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent |

## Accessories

**L99040** - PRODIGY SUSPENDED PLEXI KIT



**L99190** - RECESSED KIT



**L99041** - PRODIGY FLUSH-MOUNTING BOX



**L99045** - FIXATION 45°



**L91070** - PICTO ADHESIVE 218mm X 85mm LEFT



**L91071** - PICTO ADHESIVE 218mm X 85mm RIGHT



**L91072** - PICTO ADHESIVE 218mm X 85mm DOWN



**L91073** - PICTO ADHESIVE 218mm X 85mm EXIT



**L27-RAL** - PRODIGY RAL COLOR OPTION




**L91076** - PICTO ADHESIVE 218mm X 85mm FIRE EXTINGUISHER




**L91077** - PICTO ADHESIVE 218mm X 85mm HOSE REEL



**L99007** - FLAG FIXATION



**L99157** - INHIBITION KIT FOR PERMANENT VERSION




**L99021** - PROTECTION GRID



**L99150** - COMMANDER



**L99010** - CABLE ENTRY

