
QUBE
L24345-AUT

IK06


QUBE 44m 3h M/NM AUT IP43



CODE	L24345-AUT
POWER (W)	
AUTONOMY (U)	3h
TYPE	Permanent
RESCUE (LM)	
PERMANENT (LM)	
BATTERY	

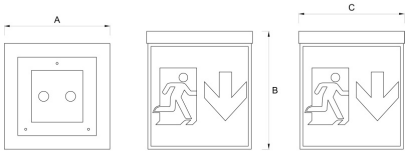

A=250mm B=270mm C=250mm



Features

PRODUCT NAME	QUBE
PRODUCT FUNCTION	LUMINAIRES DE SIGNALISATION LED NON HERMETIQUES
SIGHT DISTANCE (M) :	44M
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES

PROTECTION CLASS	IP32
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	NOIR RAL 7021
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK06
HEIGHT/DEPTH (MM) :	250mm
LENGTH (MM) :	250mm
WIDTH (MM) :	270mm
MOUNTING WIDTH	250mm
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
INCLUDED PICTOGRAMS	OUI
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020446
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
EAN	8021046118285
INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 62034 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Evacuation lighting
INSTALLATION METHOD	Chain Hanging Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Autotest Security
NOMINAL OPERATING TIME	3h

PROTECTION CLASS	II
TYPE OF SWITCHING	Permanent

Accessories

LA368 - QUBE ADJUSTABLE SUSPENSION SET 2.5M 

LA369 - QUBE SUSPENSION ROD 30CM 

LA370 - QUBE SUSPENSION ROD 50CM 

LA371 - QUBE SUSPENSION ROD 100CM 

LKITQU40ISO - QUBE SET OF PICTOS 44m 