STEP-2-LED
L8033-D


IP42 IK07 6 pcs


STEM2 LED 6W 300lm/1h 100lm/3h M/NM CREPUSCULAR

The Step 2 LED provides optimal light diffusion thanks to its Fresnel lens. Versatile, it allows you to choose the level of light intensity continuously, as well as its battery life



CODE	L8033-D
POWER (W)	6W
AUTONOMY (U)	1h 3h
TYPE	Not permanent- Permanent
RESCUE (LM)	300lm (1h) - 100lm (3h)
PERMANENT (LM)	400lm (100%)- 320lm (80%)- 240lm (60%)- 160lm (40%)- 80lm (20%)
BATTERY	NI-MH

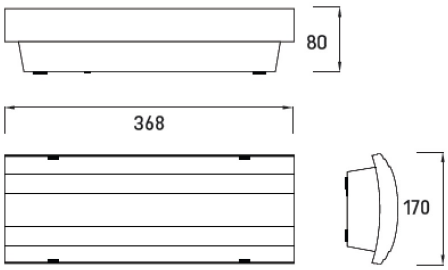

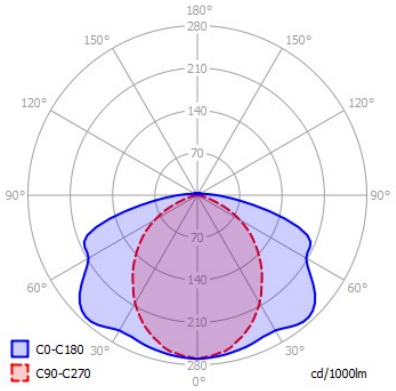

Features

PRODUCT NAME	STEP-2-LED
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	6W

STEP-2-LED
L8033-D

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	300lm (1h) - 100lm (3h)
CONTINUOUS MODE LUMINOUS FLOW (LM) :	400lm (100%)- 320lm (80%)- 240lm (60%)- 160lm (40%)- 80lm (20%)
SURVEILLANCE SYSTEM INSTALLATION	AUTO-TEST AUTOMATIQUE
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Ni-MH 3,6V - 2,2Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	80mm
LENGTH (MM) :	368mm
WIDTH (MM) :	170mm
MOUNTING WIDTH	337mm
PRODUCT WEIGHT (G) :	1300GR
NUMBER OF PRODUCTS PER BOX	6
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	NI-MH
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	100.000H
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B207035000
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	162 gr.
EAN	9900000009465

COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic) Twilight
INSTALLATION METHOD	Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
MODE	Autotest Security
NOMINAL OPERATING TIME	1h 3h
PROTECTION CLASS	II
TYPE OF PICTOGRAM	Placed sheet/plate
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99036-1 - STEP 2 SUSPENDED PLEXI KIT LEFT 

L99036-2 - STEP 2 SUSPENDED PLEXI KIT RIGHT 

L99036-3 - STEP 2 SUSPENDED PLEXI KIT DOWN 

L99036-7 - STEP 2 SUSPENDED PLEXI KIT EXIT 

L99197 - STEP 2 RECESSED KIT 

L99017 - STEP 2 FLAG FIXATION 

L99019-100 - STEP 2 SUSPENSION 100CM 

L99019-50 - STEP 2 SUSPENSION 50CM 

L99019-25 - STEP 2 SUSPENSION 25CM 

L99018 - STEP 2 WALL FIXATION 

L99046-1 - PICTO STEP 2 TO INSERT LEFT 

L99046-2 - PICTO STEP 2 TO INSERT RIGHT 

L99046-3 - PICTO STEP 2 TO INSERT DOWN 

L99046-7 - PICTO STEP 2 TO INSERT EXIT 

L99027 - CRISTAL & STEP2 PROTECTION GRID 