STEP-2-LED
L8033

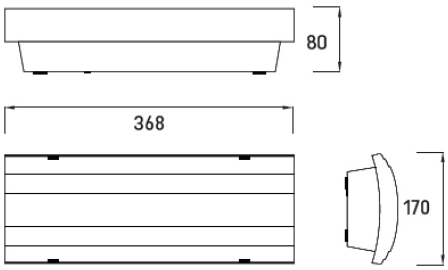
IP42 IK07 6 pcs

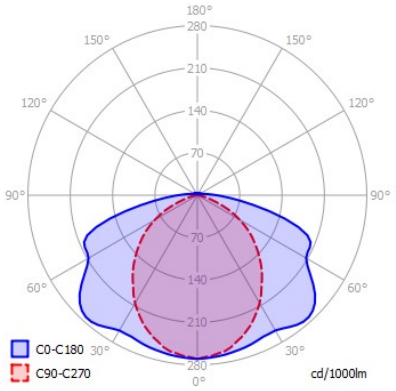
STEM2 LED 6W 300lm/1h 100lm/3h M/NM

The Step 2 LED provides optimal light diffusion thanks to its Fresnel lens. Versatile, it allows you to choose the level of light intensity continuously, as well as its battery life



CODE	L8033
POWER (W)	6W
AUTONOMY (U)	1h
	3h
TYPE	Not permanent-
	Permanent
RESCUE (LM)	300lm (1h) - 100lm (3h)
PERMANENT (LM)	400lm (100%)- 320lm
	(80%)- 240lm (60%)-
	160lm (40%)- 80lm (20%)
BATTERY	NI-MH





Features

PRODUCT NAME	STEP-2-LED
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	6W

STEP-2-LED
L8033

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	300lm (1h) - 100lm (3h)
CONTINUOUS MODE LUMINOUS FLOW (LM) :	400lm (100%)- 320lm (80%)- 240lm (60%)- 160lm (40%)- 80lm (20%)
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Ni-MH 3,6V - 2,2Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	80mm
LENGTH (MM) :	368mm
WIDTH (MM) :	170mm
MOUNTING WIDTH	337mm
PRODUCT WEIGHT (G) :	1300GR
NUMBER OF PRODUCTS PER BOX	6
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	NI-MH
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	100.000H
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B207035000
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	162 gr.
EAN	9900000003425
EAN PACK	9900000009410

COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
MODE	Autotest Security
NOMINAL OPERATING TIME	1h 3h
PROTECTION CLASS	II
TYPE OF PICTOGRAM	Placed sheet/plate
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99036-1 - STEP 2 SUSPENDED PLEXI KIT LEFT 


L99036-2 - STEP 2 SUSPENDED PLEXI KIT RIGHT 


L99036-3 - STEP 2 SUSPENDED PLEXI KIT DOWN 

L99036-7 - STEP 2 SUSPENDED PLEXI KIT EXIT 


L99197 - STEP 2 RECESSED KIT 

L99017 - STEP 2 FLAG FIXATION 

L99019-100 - STEP 2 SUSPENSION 100CM 

L99019-50 - STEP 2 SUSPENSION 50CM 

L99019-25 - STEP 2 SUSPENSION 25CM 

L99018 - STEP 2 WALL FIXATION 

L99046-1 - PICTO STEP 2 TO INSERT LEFT 

L99046-2 - PICTO STEP 2 TO INSERT RIGHT 

L99046-3 - PICTO STEP 2 TO INSERT DOWN 

L99046-7 - PICTO STEP 2 TO INSERT EXIT 

L99027 - CRISTAL & STEP2 PROTECTION GRID 