STEP-LED
L11223-3-WIR


IP42 IK07 12 pcs

STEP LED 5,50W 610lm 3h M/NM WIRELESS


The Step LED is a versatile, economical, and functional product, ideal for relamping. It allows for the quick and easy replacement of old fluorescent TL lamps with new-generation LED technology, reducing lamp replacement costs.



CODE	L11223-3-WIR
POWER (W)	5,50W
AUTONOMY (U)	3h
TYPE	Not permanent-Permanent
RESCUE (LM)	610lm
PERMANENT (LM)	610lm
BATTERY	LI-FEPO4

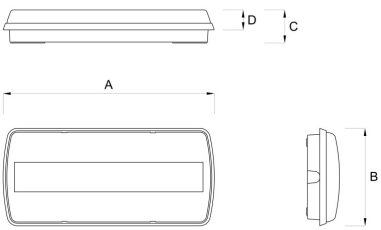

A=337mm B=155mm C=53mm D=32mm

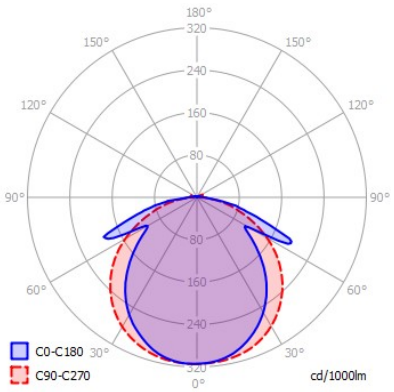

Features

PRODUCT NAME	STEP-LED

LINERGY
EMERGENCY LIGHTING

STEP-LED
L11223-3-WIR

PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	5,50W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	610lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	610lm
SURVEILLANCE SYSTEM INSTALLATION	WIRELESS
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4 6,4V - 3,8Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	53mm
LENGTH (MM) :	337mm
WIDTH (MM) :	155mm
MOUNTING WIDTH	337mm
PRODUCT WEIGHT (G) :	1200GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	100.000H
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B207035220
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	183 gr.

STEP-LED
L11223-3-WIR

INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62034 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Flag mounting Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Security Wireless/Spy system wireless
NOMINAL OPERATING TIME	3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99006 - STEP SIGNALING KIT 

L99196 - STEP RECESSED KIT 

L99138 - STEP LED WHITE FRAME 

L99004 - STEP & CRISTAL & PRODIGY XL SET FOR RECESSED 


L91021 - PICTO STEP DROIT 

L91022 - PICTO STEP LEFT 

L91023 - PICTO STEP DOWN 

L91024 - PICTO STEP EXIT 

L99000 - STEP PROTECTION GRID 

L99007 - FLAG FIXATION 

L99045 - FIXATION 45°



L99150 - COMMANDER

