# STEP-LED
# L10423-3


IP42 IK07 12 pcs

**STEP LED 7,10W 810lm 3h M/NM**


The Step LED is a versatile, economical, and functional product, ideal for relamping. It allows for the quick and easy replacement of old fluorescent TL lamps with new-generation LED technology, reducing lamp replacement costs.



| | |
|---|---|
| **CODE** | L10423-3 |
| **POWER (W)** | 7,10W |
| **AUTONOMY (U)** | 3h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 810lm |
| **PERMANENT (LM)** | 810lm |
| **BATTERY** | LI-FEPO4 |

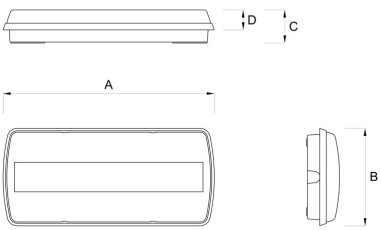


A=337mm B=155mm C=53mm D=32mm

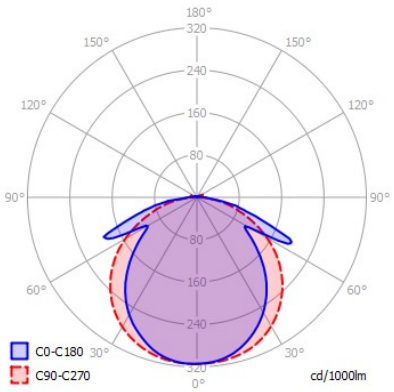


## Features

| | |
|---|---|
| PRODUCT NAME | STEP-LED |

# STEP-LED
# L10423-3

| | |
|---|---|
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES |
| SYSTEM POWER (W) : | 7,10W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 810lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 810lm |
| SURVEILLANCE SYSTEM INSTALLATION | SANS |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| WITH REMOTE CONTROL (COMMANDER) | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | LiFePO4 6,4V - 3,8Ah |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP42 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | WHITE RAL 9003 |
| MATERIAL OF THE COVER | TRANSPARENTE PLASTIC |
| IMPACT RESISTANCE | IK07 |
| HEIGHT/DEPTH (MM) : | 53mm |
| LENGTH (MM) : | 337mm |
| WIDTH (MM) : | 155mm |
| MOUNTING WIDTH | 337mm |
| PRODUCT WEIGHT (G) : | 1200GR |
| NUMBER OF PRODUCTS PER BOX | 12 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 100.000H |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| ENEC | YES |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020725 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 183 gr. |

| | |
|---|---|
| EAN | 8021046118919 |
| EAN PACK | 8021046333114 |
| INTRASTAT CODE | 85365000 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>EN 61347-1<br>EN 61347-2-13<br>EN 61347-2-7<br>EN 62031<br>EN 62384<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic) |
| INSTALLATION METHOD | Flag mounting<br>Surface mounted recessed<br>Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Security<br>Standard |
| NOMINAL OPERATING TIME | 3h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**L99006** - STEP SIGNALING KIT 

**L99196** - STEP RECESSED KIT 

**L99138** - STEP LED WHITE FRAME 

**L99004** - STEP & CRISTAL & PRODIGY XL SET FOR RECESSED 

**L91021** - PICTO STEP DROIT 

**L91022** - PICTO STEP LEFT 

**L91023** - PICTO STEP DOWN 

**L91024** - PICTO STEP EXIT 

**L99000** - STEP PROTECTION GRID 

**L99007** - FLAG FIXATION 

**L99045** - FIXATION 45°



**L99150** - COMMANDER

