
# STORM
# L25026-N


IP66 IK10

## STORM 18W 5000K 1500lm 3h IP66 M/NM BLACK AUT



| | |
|---|---|
| **CODE** | L25026-N |
| **POWER (W)** | 18W |
| **AUTONOMY (U)** | 3h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 1500lm |
| **PERMANENT (LM)** | 1500lm |
| **BATTERY** | LI-FEPO4 |

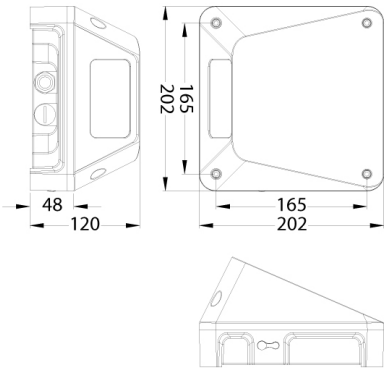

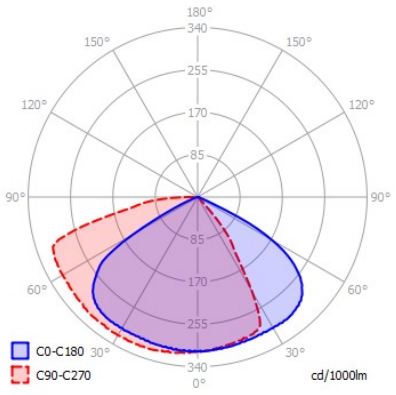
## Features

| | |
|---|---|
| PRODUCT NAME | STORM |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED HERMÉTIQUES |
| SYSTEM POWER (W) : | 18W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 1500lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 1500lm |

| | |
|---|---|
| SURVEILLANCE SYSTEM INSTALLATION | AUTO-TEST AUTOMATIQUE |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | LiFePO4 6,4V - 6Ah |
| BATTERY RECHARGE TIME (H) : | 24H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP66 |
| HOUSING MATERIAL | FONTE D'ALUMINIUM |
| HOUSING COLOUR | NOIR RAL 7021 |
| MATERIAL OF THE COVER | VERRE TRANSPARENT |
| IMPACT RESISTANCE | IK10 |
| HEIGHT/DEPTH (MM) : | 120mm |
| LENGTH (MM) : | 202mm |
| WIDTH (MM) : | 202mm |
| INCANDESCENT WIRE 850°C | OUI |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 100.000H |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | -20°C / +40 °C |
| COLOUR TEMPERATURE | 5000K |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| BEBAT CODE | B110020825 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 296 gr. |
| EAN | 9900000005092 |
| EAN PACK | 9900000008413 |
| INTRASTAT CODE | 85365000 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>EN 62034 |
| FUNCTION | Ambient and evacuation lighting<br>Twilight |
| INSTALLATION METHOD | Surface mounting (wall) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Autotest<br>Light ON/OFF<br>Security |

| | |
|---|---|
| NOMINAL OPERATING TIME | 3h |
| PROTECTION CLASS | I |
| TYPE OF SWITCHING | Not permanent<br>Permanent |